


MODEL 322 CONTROL PANEL

Three Phase, Duplex Alternating Pump Control with Override

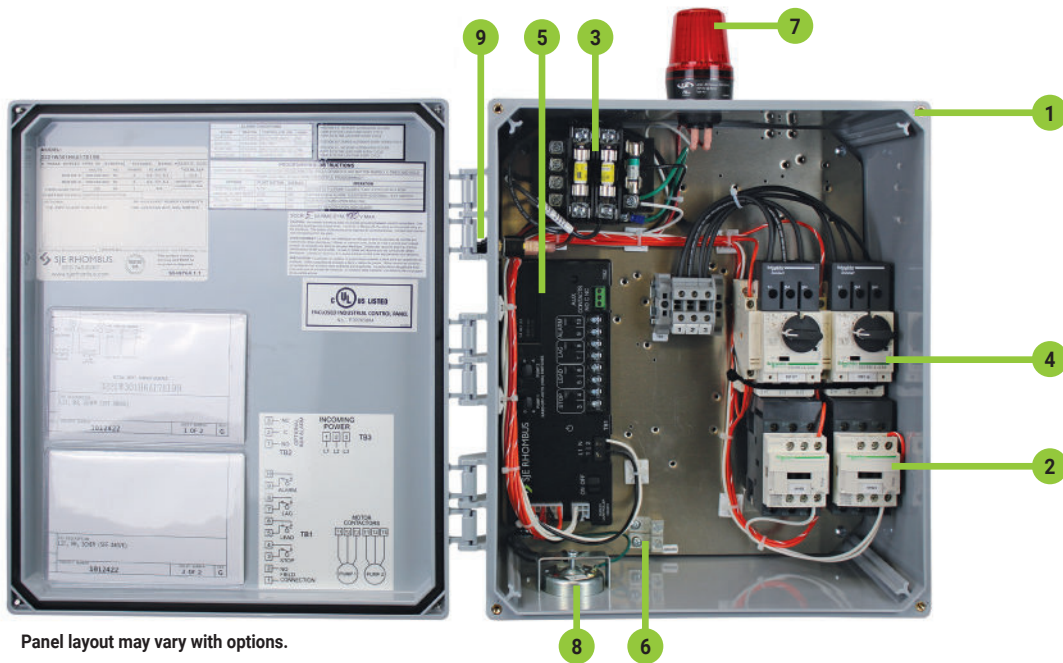

Panel layout may vary with options.

The newly redesigned Model 322 control panel controls two 208/240/480V three phase pumps in water and sewage installations. This panel includes a new innovative duplex controller for pump control, alternation and alarm; including float status LEDs, control/alarm power on/off switch with LED indicator, pump run LEDs, HOA switches, pump lead lag selector switch, auxiliary contacts and more!

The Model 322 control panel features built in lag pump delay time, pump failure detection, and float out of sequence. In addition, there are four user selectable field programmable operations: alarm steady state or flashing; alarm auto reset or manual reset; pump failure notification; and optional seal failure alarm beacon notification or beacon plus horn activation. This panel is available with optional EZconnex® float connection system.

Other features include:

- Touch safe circuit board housing and low voltage 12 VDC float circuits
- Alarm (field programmable to flash)
- Alarm automatic reset (field programmable to manual alarm reset)
- Float out-of-sequence detection
- Pump fail-to-run detection (field programmable to deactivate)
- Controller protected by four auto resettable fuses (control, alarm, pump 1, and pump 2), no fuse replacement
- Three second lag pump delay time, prevents simultaneous pump start-up

COMPONENTS

1. NEMA 4X (ultraviolet stabilized thermoplastic with removable mounting feet for outdoor or indoor use) enclosure; enclosure measures 14 x 12 x 6 inches (35.56 x 30.48 x 15.24 cm)
2. IEC motor contactors control pumps by switching electrical lines
3. Multi-tap transformer (208/240/480 VAC primary or 600 VAC primary transformer) provides 120 VAC control/alarm voltage
4. Motor protective switches provide adjustable overload, branch circuit protection and pump disconnect
5. Duplex controller provides pump control, alternation and alarm
 - a. HOA switches for manual control Hand/Off/Automatic
 - b. Control power ON/OFF switch
 - c. Power ON green LED indicator
 - d. Float status red LED indicators
 - e. Float push-to-test buttons
 - f. Pump selector switch: Alt, 1-lead 2-lag, 2-lead 1 lag
 - g. Auxiliary alarm contacts Form C
 - h. Terminal block: incoming power
 - i. Terminal block: float switches
 - j. Option: adjustable seal failure circuits and red LED indicators (must select option 5E when ordering)
6. Ground lugs
7. Red LED beacon provides 360° visual check of alarm condition
8. Alarm horn provides audible alarm warning (83 to 85 decibel rating)
9. Exterior alarm Test/Normal/Silence switch allows horn and light to be tested and horn to be silenced in an alarm condition; alarm automatically resets once alarm condition is cleared

Note: Options may increase enclosure size and/or change enclosure features/component layout.

Note: Schematic/Wiring Diagram and Pump Specification Label are located inside the panel.



MODEL 322 - Three phase, duplex alternating pump control with override.

322 CONTROL PANEL	ALARM PACKAGE	W ENCLOSURE RATING	PUMP FULL LOAD AMPS	LEVEL CONTROL APPLICATION	6A10E19B OPTIONS (LISTED BELOW)
-----------------------------	----------------------	------------------------------	----------------------------	----------------------------------	---

CONTROL PANEL	✓	322	Three Phase Duplex (includes Options 6A and 19B as standard)	
ALARM PACKAGE		0	Select Options or No Alarm Package	
		1	Alarm Package (includes test/normal/silence switch, red light, & horn)	
ENCLOSURE RATING	✓	W	Weatherproof, NEMA 4X (engineered thermoplastic)	
PUMP FULL LOAD AMPS	208/240/480V		600V	
		001	1.0 - 1.6 FLA	005 1.0 - 1.6 FLA
		101	1.6 - 2.5 FLA	105 1.6 - 2.5 FLA
		201	2.5 - 4.0 FLA	205 2.5 - 4.0 FLA
		301	4.0 - 6.3 FLA	305 4.0 - 6.3 FLA
		401	6.0 - 10.0 FLA	405 6.0 - 10.0 FLA
		511	9.0 - 14.0 FLA	515 9.0 - 14.0 FLA
		611	13.0 - 18.0 FLA	615 13.0 - 18.0 FLA
		621	17.0 - 23.0 FLA	625 17.0 - 23.0 FLA
		701	20.0 - 25.0 FLA	705 20.0 - 25.0 FLA
LEVEL CONTROL APPLICATION		H	Floats - Pump Down (select Option 17 below - ships with 3 floats by default)	
		L	Floats - Pump Up (select Option 17 below - ships with 3 floats by default)	
		E	EZconnex® Float Switch System	
		X	No Floats	

PRICING WORKSHEET

Model 322 Base Price	_____
Alarm Package	_____
Enclosure Rating	_____
Pump Full Load Amps	_____
Level Control Application	_____
Total Options	_____
Enclosure Upsize	_____
TOTAL LIST PRICE	_____

OPTIONS	DESCRIPTION
4A	Redundant Off (must also select Option 4D if floats are required)
4B	Red Redundant Off Indicator & Alarm (must also select Option 4A)
4D	Redundant Off Float (must also select Option 4A and Option 17)
5A	Thermal Cutout/Heat Sensor Auto Reset (for pumps with thermal switch leads)
5E	Seal Failure Circuit & Red Indicator (2 wire)
✓ 6A	Auxiliary Alarm Contact, Form C (included as standard)
8A	Elapsed Time Meter
8C	Event (Cycle) Counter
10A	Clear Inner Swing-Out Door with Dead Front (lights and switches mounted on inner door) PANELS ORDERED WITH THIS OPTION CANNOT BE RETURNED
✓ 10E	Lockable Latch - NEMA 4X (included as standard)
10G	Lightning Arrestor
10K	Anti-condensation Heater
14B	Main Disconnect (rotary style, mounted through door, non-fused, padlockable in the OFF position, door interlock in the ON-position)
	0-20 FLA (total of both pumps)
	20-50 FLA (total of both pumps)

OPTIONS	DESCRIPTION
16C	30' Cord in Lieu of 20' Cord (per float)
16D	40' Cord in Lieu of 20' Cord (per float)
17C	Sensor Float® / Internally Weighted (3 Floats) - Mercury
17D	Sensor Float® / Externally Weighted (3 Floats) - Mercury
17E	Sensor Float® Mini / Pipe Clamp (3 Floats) - Mercury
17F	Sensor Float® Mini / Externally Weighted (3 Floats) - Mercury
17G	SJE MilliAmpMaster™ / Pipe Clamp (3 Floats) - Mechanical
17H	SJE MilliAmpMaster™ / Externally Weighted (3 Floats) - Mechanical
17J	Sensor Float® / Pipe Clamp (3 Floats) - Mercury
✓ 19B	Lead Lag Selector Switch (included as standard)
19F	Fourth Float to Separate Alarm Function from Lag
19T	TOA (Test/Off/Automatic) Switches and Pump Run Lights Through Door Mounted
19U	HOA (Hand/Off/Automatic) Switches and Pump Run Lights Through Door Mounted
19X	Door Mounted Pump Run Indicator
33D	EZconnex® 3-Port, 25', with 10' Floats (3) / Pipe Clamp
35D	EZconnex® 4-Port, 25', with 10' Floats (4) / Pipe Clamp

For additional control panel options, please contact Technical Support at techsupport@sjeinc.com.

Three Phase