Little GIANT®

3-MD-HC



Features


- Thermally protected, open, fan-cooled motor
- Ball bearings
- 6' power cord with 3-prong plug (no plug on 230V)
- Specific gravity to 1.1
- Fluid temperature to 200°F
- Ambient air temperature to 77°F
- Run-dry capability up to 8 hours
 NOTE: Consult your local distributor or the factory for applications with higher ambient temperatures, specific gravities and viscosities.

Construction

- Volute Glass-filled Ryton®
- Housing Glass-filled Ryton®
- Impeller Glass-filled Ryton® w/carbon bushing
- Shaft Ceramic
- Thrust Washers Ceramic
- O-Ring Viton®

The Little Giant MD-HC series features leakproof, seal-less magnetic drives and are designed for in-line, non-submersible use. Volute, magnet housing and impeller are glass-filled Ryton® for excellent chemical resistance. Ceramic shaft and thrust washers are 99.5% pure alumina for excellent wear and trouble-free service. Pumping heads are easily rotated, cleaned or serviced with no special tools required. Spindle shaft is supported at both ends to prevent impeller damage during start-up and stop of pump.


3-MD-HC

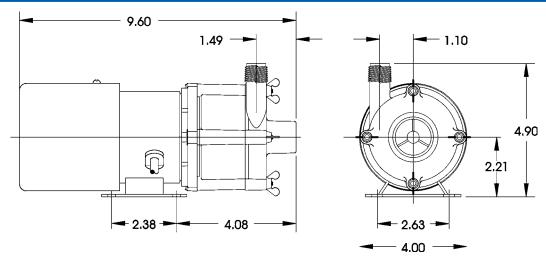


NOTE: Designs and dimensions may vary for various reasons (i.e. type of motor). This information should be used as general guide rather than an unqualified guarantee. Specifications are subject to change without prior notice.

Specifications

| Model | Item | Intake | Discharge | | | | | | | Perfor | mance (| GPM @ | Head) | | Shu | t Off | Power | Weight |
|---------|--------|-----------|-----------|------------|--------|-----------|-------|------|-------|--------|---------|-------|-------|-----|------|-------|------------|--------|
| No. | No. | Size | Size | Listing(s) | HP | Volts | Hertz | Amps | Watts | 1' | 3' | 6' | 9' | 15' | Feet | PSI | Cord (ft.) | (lbs.) |
| 3-MD-HC | 581603 | 3/4" FNPT | 1/2" MNPT | UR/C-CSA | 1/12 | 115 | 60 | 2.4 | 180 | 12.5 | 11.5 | 11.1 | 10 | 7.1 | 21.9 | 9.5 | 6 | 8.80 |
| 3-MD-HC | 581613 | 3/4" FNPT | 1/2" MNPT | UR/C-CSA | 1/12 | 230 | 60 | 1.2 | 181 | 12.5 | 11.5 | 11.1 | 10 | 7.1 | 21.9 | 9.5 | 6 | 8.80 |
| 3-MD-HC | 581697 | 3/4" FNPT | 1/2" MNPT | | Pump F | lead Less | Motor | | | | | | | | | | | 2.30 |



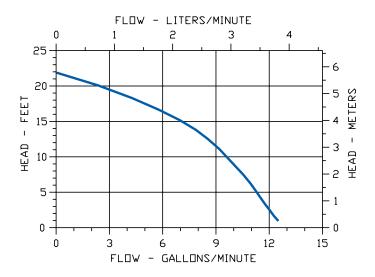

Replacement Parts

| | ITEM | PART NO. | DESCRIPTION |
|---|------|----------|------------------|
| | Α | 181204 | Volute |
| | В | 924008 | O-ring |
| | C | 921077 | Thrust washer |
| | D | 181143 | Impeller/Bushing |
| | Ш | 180057 | Shaft |
| ı | F | 182006 | Housing |
| | 1 | 920003 | Wing nut |
| ١ | 2 | 911403 | Stud, collared |
| | 3 | 182602 | Drive magnet |
| ı | 4 | 180048 | Mounting bracket |

NOTE: Parts A-F contact fluid

Little GIANT®
PO Box 12010 • Oklahoma City, OK 73157

Phone: 800.701.7894 • Fax: 800.701.8046 E-mail: customerservice@littlegiant.com