



# J / JH SERIES

THE RIGHT PUMP FOR  
TOUGH JOBS

## ELECTRIC SUBMERSIBLE SUMP PUMPS



## THE SOLUTION TO GENERAL WASTE-WATER PUMPING

HIGH HEAD OR HIGH VOLUME DRAINAGE OF CLEAN AND DIRTY WATER FROM SUMPS, BASINS AND TANKS IN PLANTS, COMMERCIAL, PUBLIC AND RESIDENTIAL FACILITIES.

# J and JH Submersible Pumps Superior Construction

## BJM air filled motors

- Class F insulation
- High temperature / amp protection
- 115, 230V - 1 phase
- 230, 460V- 3 phase
- 208, 575V available



## Double mechanical seals

- Lower: Silicon Carbide
- Upper: Carbon Ceramic
- Seal Minder® optional (not available on J400)

## Accessories

- Slide rails
- Level switches
- Pump Controls
- Alarm boxes
- ANSI flanges

**Cast iron volute and impeller 304SS motor housing for superior heat transfer.  
All J / JH models are available in 316SS for corrosive service.**

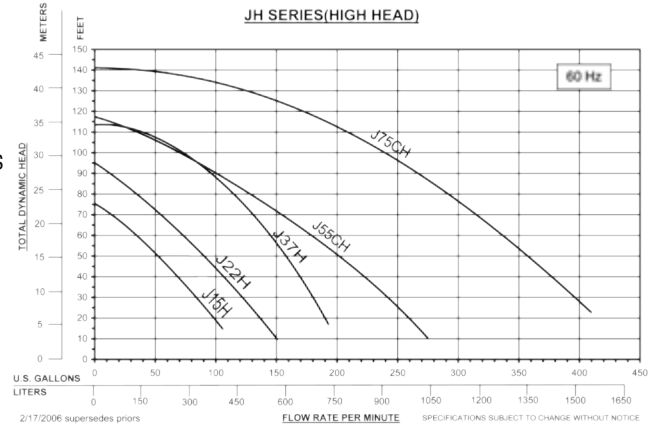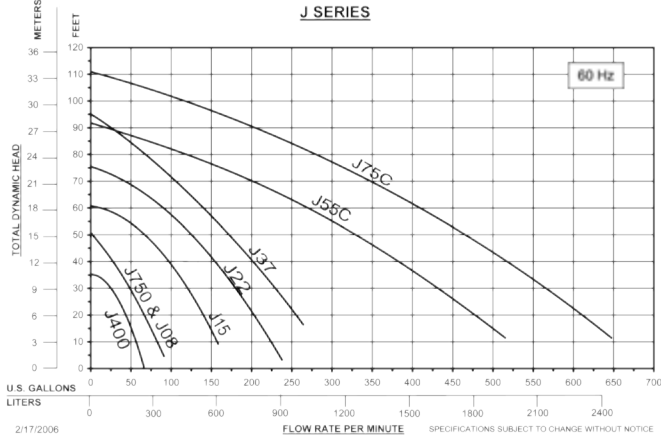

| MODEL | DISCH. SIZE | H.P. | VOLT    | PHASE | RPM  | RATED AMPS | MAX SOLIDS | MAX HEAD | MAX GPM | WEIGHT LBS. | HEIGHT | WIDTH | CABLE |
|-------|-------------|------|---------|-------|------|------------|------------|----------|---------|-------------|--------|-------|-------|
| J400  | 2"          | 0.5  | 115/230 | 1     | 3450 | 7.6/3.8    | 1/8"       | 35'      | 66      | 38          | 15.7"  | 8.5"  | 33'   |
| J750  | 2"          | 1    | 115/230 | 1     | 3450 | 14/7       | 3/16"      | 51'      | 91      | 66          | 17.3"  | 11.2" | 33'   |
| J08   | 2"          | 1    | 230/460 | 3     | 3450 | 3/1.5      | 3/16"      | 51'      | 91      | 60          | 15.2"  | 11.2" | 33'   |
| J15   | 3"          | 2    | 230/460 | 3     | 3450 | 6/3        | 3/16"      | 60'      | 158     | 72          | 16.4"  | 11.2" | 33'   |
| J22   | 3"          | 3    | 230/460 | 3     | 3450 | 9/4.5      | 3/8"       | 75'      | 237     | 96          | 18.5"  | 12.5" | 33'   |
| J37   | 3" or 4"    | 5    | 230/460 | 3     | 3450 | 14/7       | 3/8"       | 95'      | 264     | 108         | 19.7"  | 12.5" | 33'   |
| J55C  | 4"          | 7.5  | 230/460 | 3     | 3450 | 21/10.5    | 3/8"       | 92'      | 515     | 233         | 25.5"  | 20.5" | 33'   |
| J75C  | 4"          | 10   | 230/460 | 3     | 3450 | 30/15      | 3/8"       | 110'     | 647     | 258         | 27.75" | 20.5" | 33'   |

| MODEL | DISCH. SIZE | H.P. | VOLT    | PHASE | RPM  | RATED AMPS | MAX SOLIDS | MAX HEAD | MAX GPM | WEIGHT LBS. | HEIGHT | WIDTH | CABLE |
|-------|-------------|------|---------|-------|------|------------|------------|----------|---------|-------------|--------|-------|-------|
| J15H  | 2"          | 2    | 230/460 | 3     | 3450 | 6/3        | 3/16"      | 75'      | 105     | 66          | 16.4"  | 11.2" | 33'   |
| J22H  | 2"          | 3    | 230/460 | 3     | 3450 | 9/4.5      | 3/8"       | 95'      | 150     | 94          | 18.5"  | 12.5" | 33'   |
| J37H  | 2"          | 5    | 230/460 | 3     | 3450 | 14/7       | 3/8"       | 113'     | 192     | 108         | 19.7"  | 12.5" | 33'   |
| J55CH | 3"          | 7.5  | 230/460 | 3     | 3450 | 21/10.5    | 3/8"       | 117'     | 274     | 227         | 25.5"  | 20.5" | 33'   |
| J75CH | 4"          | 10   | 230/460 | 3     | 3450 | 30/15      | 3/8"       | 141'     | 409     | 252         | 27.75" | 20.5" | 33'   |

SPECIFICATION SUBJECT TO CHANGE WITH OUT NOTICE

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

|  |                     |
|--|---------------------|
|  <p>123 Spencer Plain Road<br/>P.O. Box 1138<br/>Old Saybrook, CT 06475<br/>Tel: (860)-399-5937<br/>Toll Free: (877)-BJM-PUMP<br/>Fax: (860)-399-7784<br/>Web: www.bjmpumps.com</p> | <p>Distributor:</p> |
|--|---------------------|