


Item # 851125, A2SA-X230

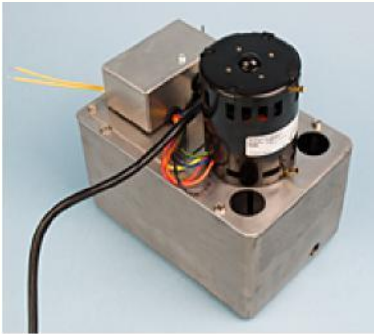

A2SA-X230

- Cast aluminum components
 - Usable Lifts over 40 feet
- Heavy duty design for industrial applications
- Allows condensate removal without having floor drains.
 - UL listing on A2-SA-UR (851034).

Note: Flow will vary with line losses.

SPECIFICATIONS

Model	A2SA-X230
Current	2.0 A
Voltage	230 V
Motor Speed	3000 rpm
Motor Power	1/10 hp
Max. Lift	19.5 ft
Inlet (ID)	2 INLETS AT 1 1/4 inches
Outlet Size	3/8 inches
Outlet Connection Type	FNPT
Weight	12 lb
Flow Rate at Lift of 6'	185 gal/h
Flow Rate at Lift of 12'	139 gal/h
Flow Rate at Lift of 18'	79 gal/h
Flow Rate at Lift of 20'	51 gal/h
Cord and Plug	6 ft
Auxiliary Switch	Yes

20' Tubing	No
Shut off	22 ft
Reservoir	1 gal
Sealed Reservoir	No
Unit Dimensions (W x D x H)	6" x 9" x 11"
Width	6 inches
Depth	9 inches
Height	11 inches
Max. Temperature	212 °F
Mast. Ctn.	4 pcs.