



## Think Stainless

### – The open/closed system solution

Choosing a stainless steel circulator ensures that you will always have the right pump - whether it is an open or closed system. Grundfos offers three stainless steel models, including two that feature our 3-speed SuperBrute technology.

#### Features

- Perfect for hot water recirculation applications
- Stainless steel – Protects against corrosive fluids
- Available in standard union or two-bolt flange
- 3-speed SuperBrute technology available
- Timer and line-cord options available
- Integrated, removable check valve
- Quick connect terminals – for easy installation
- Highest starting torque in its class
- Industry leading three-year warranty



UPS 15-55SFC



Water Quality  
ANSI/NSF61

## – Stainless Models

| Model 115V      | Material Number | Two Bolt Flange (GF15/26) | 1-1/4" Union (GU 125) | Line Cord | Timer | Check Valve | 3-Speed |
|-----------------|-----------------|---------------------------|-----------------------|-----------|-------|-------------|---------|
| UP15-29SF       | 59896771        | •                         |                       |           |       |             |         |
| UP15-29SU       | 59896775        |                           | •                     |           |       |             |         |
| UP15-29SU/LC    | 59896776        |                           | •                     | •         |       |             |         |
| UP15-29SUC/TLC  | 59896777        |                           | •                     | •         | •     | •           |         |
| UPS15-35SFC     | 59896772        | •                         |                       |           |       | •           | •       |
| UPS15-35SUC     | 59896778        |                           | •                     |           |       | •           | •       |
| UPS15-35SUC/TLC | 59896780        |                           | •                     | •         | •     | •           | •       |
| UPS15-55SFC     | 59896773        | •                         |                       |           |       | •           | •       |
| UPS15-55SUC     | 59896781        |                           | •                     |           |       | •           | •       |
| UPS15-55SUC/TLC | 59896783        |                           | •                     | •         | •     | •           | •       |



| Model 230V | Material Number | Two Bolt Flange (GF15/26) | 1-1/4" Union (GU 125) | Line Cord | Timer | Check Valve | 3-Speed |
|------------|-----------------|---------------------------|-----------------------|-----------|-------|-------------|---------|
| UP15-29SU  | 59896784        |                           | •                     |           |       |             |         |
| UP15-35SUC | 59896785        |                           | •                     |           |       | •           |         |
| UP15-55SUC | 59896786        |                           | •                     |           |       | •           |         |



**3-speed model**



**TLC model**

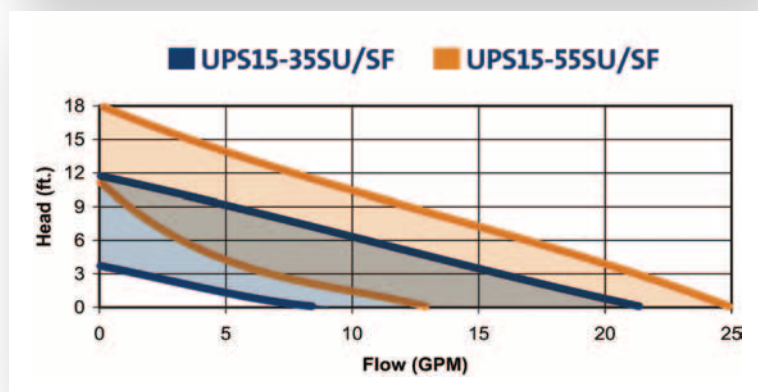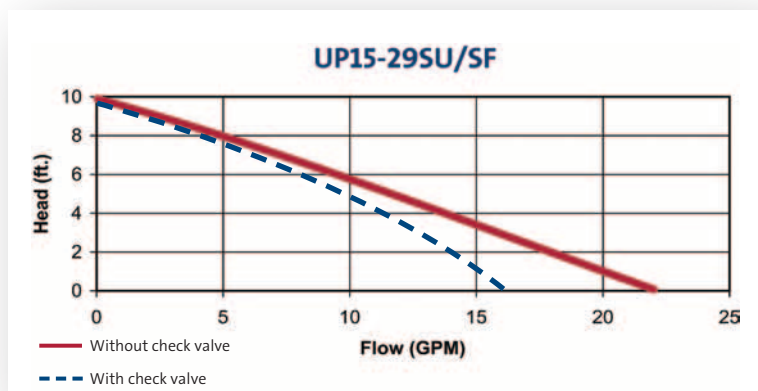

| Model 115V       | Max. Fluid Temp. | Min. Fluid Temp. |
|------------------|------------------|------------------|
| UP15-29 SU/SF    | 230°F (110°C)    | 36°F (2°C)       |
| UP15-29 SU LC    | 230°F (110°C)    | 36°F (2°C)       |
| UP15-29 SUC TLC  | 150°F (65°C)     | 36°F (2°C)       |
| UPS15-35 SUC/SFC | 165°F (73°C)     | 36°F (2°C)       |
| UPS15-35 SUC TLC | 150°F (65°C)     | 36°F (2°C)       |
| UP15-55 SUC/SFC  | 230°F (110°C)    | 36°F (2°C)       |
| UP15-55 SUC TLC  | 150°F (65°C)     | 36°F (2°C)       |
| Model 230V       |                  |                  |
| UP15-29 SU       | 230°F (110°C)    | 36°F (2°C)       |
| UP15-35 SUC      | 230°F (110°C)    | 36°F (2°C)       |
| UP15-55 SUC      | 230°F (110°C)    | 36°F (2°C)       |



**100% STAINLESS STEEL VOLUTE**

L-UP-SL-032 9/08 (US)