

VersaFlo® 3-Speed Circulator Pumps

Grundfos VersaFlo UPS circulators are designed for circulation of liquids in heating and air conditioning systems. These pumps are typically applied in large residential and commercial applications. VersaFlo UPS circulators are also available in bronze pump housings which are suitable for hot water recirculation as well as other system applications.




Features

- 3 Speed Motor Technology
 - Reduces Noise & Power Consumption
- Exclusive Wet Rotor Technology Up To 3 HP
- Built-In Motor Protection For Long Life
- Whisper Quiet
- 30 Month Warranty
- Direct Cross Over
 - B&G Series 60 & 80
 - Taco Series 1600
 - Armstrong Series H, 1050, 1060
- Maintenance Free
 - No Mechanical Seal
 - Water Cooled Motor
 - Leak Proof



VersaFlo® 3-Speed Circulator Pumps

Available in Cast Iron & Bronze

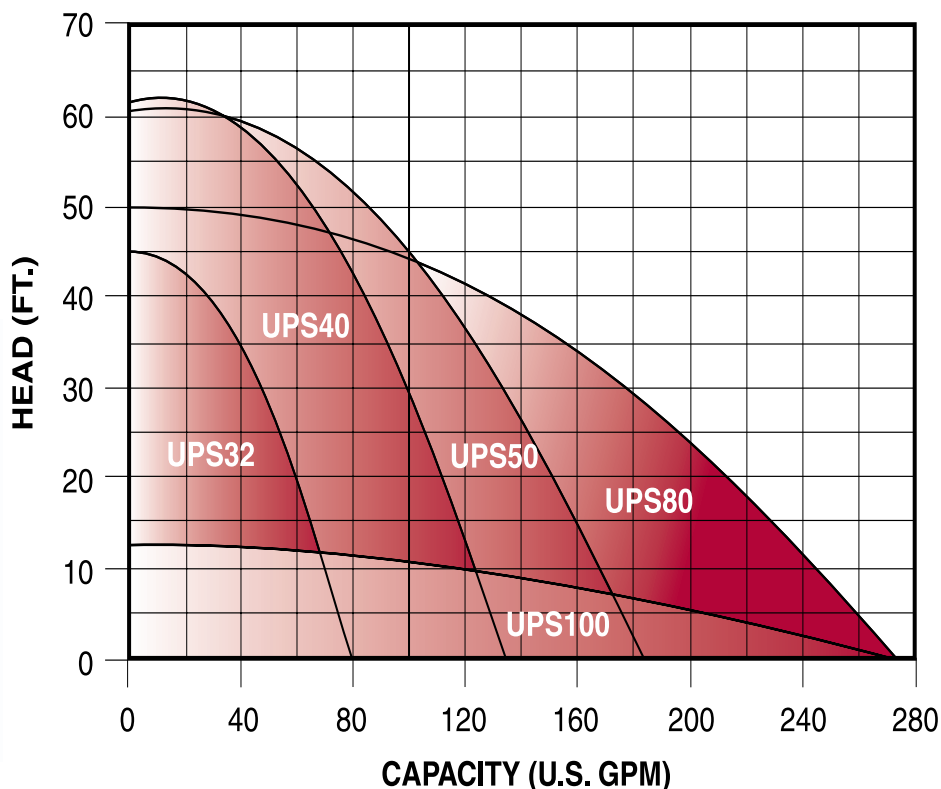

Product Range

Model	Flow U.S. GPM	Head FEET	PH	MAX. RPM	Flange
UPS 32-40/4	9-52	1-11	1, 3	1750	1 1/4" NON ANSI 2 bolt w/ (2) 1/2" dia holes
UPS 32-80/2	9-67	1-25	1, 3	3450	1 1/4" NON ANSI 2 bolt w/ (2) 1/2" dia holes
UPS 32-160/2	9-76	1-45	1, 3	3450	1 1/2" NON ANSI 2 bolt w/ (2) 1/2" dia holes
UPS 40-40/4	13-85	1-11	1, 3	1750	1 1/2" NON ANSI 2 bolt w/ (2) 1/2" dia holes
UPS 40-80/2	13-105	1-30	1, 3	3450	1 1/2" NON ANSI 2 bolt w/ (2) 1/2" dia holes
UPS 40-80/4	13-120	1-25	1, 3	1750	1 1/2" NON ANSI 2 bolt w/ (2) 1/2" dia holes
UPS 40-160/2	13-110	1-46	1, 3	3450	1 1/2" NON ANSI 2 bolt w/ (2) 1/2" dia holes
UPS 40-240/2	13-130	1-62	1, 3	3450	1 1/2" NON ANSI 2 bolt w/ (2) 1/2" dia holes
UPS 50-40/4	20-125	1-12	1, 3	1750	2" NON ANSI 4bolt w/ (4) 9/16" dia holes
UPS 50-80/4	20-160	1-24	1, 3	1750	2" NON ANSI 4bolt w/ (4) 9/16" dia holes
UPS 50-80/2	20-150	1-30	1, 3	3450	2" NON ANSI 4bolt w/ (4) 9/16" dia holes
UPS 50-160/2	20-170	1-46	1, 3	3450	2" NON ANSI 4bolt w/ (4) 9/16" dia holes
UPS 50-240/2	20-180	1-62	3	3450	2" NON ANSI 4bolt w/ (4) 9/16" dia holes
UPS 80-40/4	30-200	1-13	3	1750	3" ANSI R.F.
UPS 80-80/4	30-260	1-25	3	1750	3" ANSI R.F.
UPS 80-160/2	30-275	1-49	3	3450	3" ANSI R.F.
UPS 100-40/4	30-270	1-12	3	1750	4" ANSI R.F.

also available in single speed motors

UP 43-70F	15-100	1-23	1	3450	1 1/2" NON ANSI 2 bolt w/ (2) 1/2" dia holes
UP 43-110F	15-105	1-37	1	3450	1 1/2" NON ANSI 2 bolt w/ (2) 1/2" dia holes

L-UP-SL-026 Rev. 10/05 (US)

U.S.A.
GRUNDFOS Pumps Corporation
17100 West 118th Terrace
Olathe, Kansas 66061
Phone: (913) 227-3400
Telefax: (913) 227-3500

Canada
GRUNDFOS Canada Inc.
2941 Brighton Road
Oakville, Ontario
L6H 6C9
Phone: (905) 829-9533
Telefax: (905) 829-9512

Mexico
Bombas GRUNDFOS de Mexico S.A. de C.V.
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
C.P. 66600 Apodaca, N.L. Mexico
Phone: 011-52-81-8144 4000
Telefax: 011-52-81-8144 4010

GRUNDFOS

www.grundfos.com