



SEWAGE PUMP E7105



1 HP – 6000 GPH @ 10ft



E7105-VSC1.5

Switch Options Available:



Models available:

- E7105-NS: (No Switch - pump only)
- E7105-VS: (No controller - pump and vertical switch only)
- E7105-VSC1.5: (Includes enhanced controller with vertical float switch)
- E7105-VSC2: (Includes deluxe controller with vertical float switch)
- E7105-VSC3: (Includes high-cycle controller with vertical float switch)
- E7105-TS: (No controller - pump and tether switch only)
- E7105-TSC1.5: (Includes enhanced controller with tether switch)
- E7105-TSC2: (Includes deluxe controller with tether switch)
- E7105-TSC3: (Includes high-cycle controller with tether switch)



Industrial Grade for the Residential Market

www.StopFlooding.com


800-991-0466



SEWAGE PUMP E7105

Features and Construction

- Cast iron / stainless steel construction
- Continuously duty rated
- Energy efficient permanent split capacitor (PSC) motor
- Handles 2-inch solids with 2-inch discharge
- Thermally protected
- Water cooled motor (no cooling oil)
- Electroplated steel shaft
- Upper and lower sealed ball bearings
- Cast iron vortex impeller
- Dual Carbon/ceramic seals plus (1) Buna-N-Seal
- 10-foot Pump cord

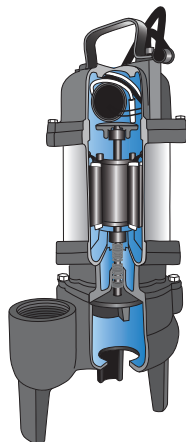

Specifications and Dimensions

Flow @0 ft Head	8040 GPH/134 GPM
Flow @10 ft Head	6000 GPH/ 100 GPM
Max head	32 ft (9.7 m)
Discharge	2 in (5.1 cm)
Motor HP/Type	1 HP - PSC Motor
Voltage	115 VAC, 60 Hz
Amp Draw @ 10 ft. Head	10.5 Amps
Width	9 in (22.9cm)
Depth	5.875 in (16.5 cm)
Height	20 in (50.8 cm)
Weight	41.1 lbs (18.6 kg)

Mix and Match Ordering

You have flexibility to order any pump with any switch

- **Option 1** - Order a pump and a switch as separate items
- **Option 2** - Order as a pre-packaged system with any switch in a single carton, ready for delivery

Switches and Controllers Comparison

Includes: Manual and stainless steel hose clamp

Standard Enhanced Deluxe High-Cycle

VS VSC1.5 VSC2 VSC3
TS TSC1.5 TSC2 TSC3

Sounds an alarm and alerts when:

AC power has failed		•	•
Pump or float problem is detected		•	•
9V battery is low or slide switch is off		•	•

Remote Notification Connections:
(Allows for connection of external devices)

USB Data Port (Can send specific email, or text, or push notifications)		•	•
Remote Terminal (Allows for connection to home security or other dry contact device)		•	•

Float switch can be unplugged from controller for easy installation

System operating light (flashes)

Adjustable run time from 5-45 seconds after the float drops

Activates pump weekly to exercise and extend pump life

Universal controller mounting tabs

2-foot power cord

4-foot power cord


10-foot float switch cord

Piggy-back plug

High water Accessory Available

Designed for high-cycle applications

Flow Chart

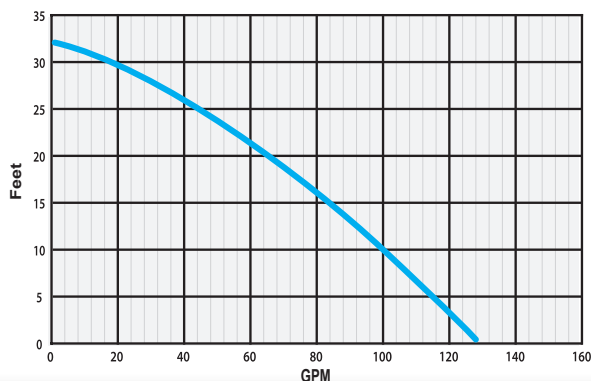

Why Pro Series Pumps

Premium Components

- Designed for higher pumping capacities, increased energy efficiencies, resulting in proven reliability
- Industrial grade, built for the residential market
- PSC motors
- Upper and lower ball bearings

Exceeding Expectations

- Patented switches and controllers with state-of-the-art monitoring systems
- "Good, Better, Best" offering allows for a wide range of products to best fit your needs

On the Forefront of Technology

- Many of the models within the Pro Series line have a USB Data Port and Remote Terminal which allows for connection to an external device that can notify a home owner of a problem or needed maintenance while away from home
- Receive text, email, or push notifications while away from home

Available from: