


CURVES
B-191C



Series e-90

CLOSE COUPLED IN-LINE CENTRIFUGAL
PUMP PERFORMANCE CURVES - 60 HZ

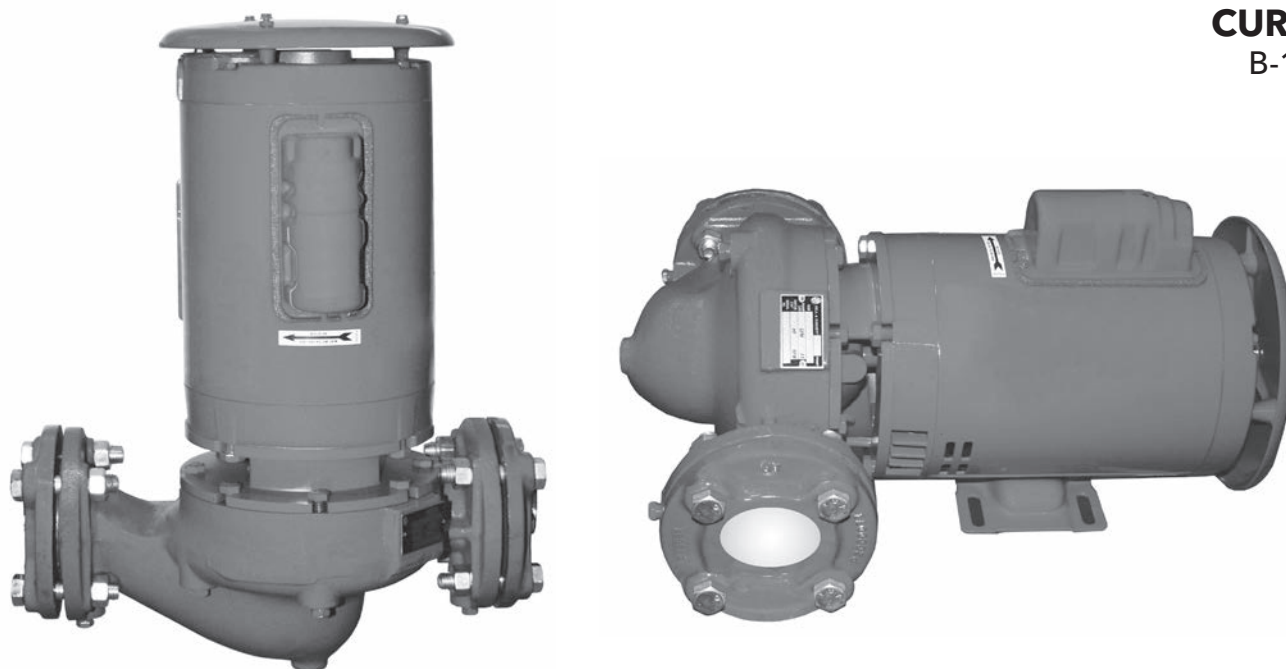

Bell & Gossett

a xylem brand

TABLE OF CONTENTS

Standard Pumps	3
Standard Series 1725 RPM PUMP CURVES & 3450 RPM PUMP CURVES	4
1800 RPM PUMP CURVES	
1AAB & 1.25AAB Curves	5
1.5AAB & 2AAB Curves	6
2AAC & 3AAB Curves	7
1.5AB & 2AB Curves	8
3600 RPM PUMP CURVES	
1AAB & 1.25AAB Curves	9
1.5AAB & 2AAB Curves	10
2AAC & 3AAB Curves	11

Centrifugal Pump Energy Efficiency Information

The U.S. Department of Energy introduced Pump Energy Conservation Standards in January of 2016. These standards apply to five styles of clean water pumps in 1800 and 3600 nominal motor speeds. Pump manufacturers must sell only compliant products after January 27, 2020. Compliant products have Pump Energy Indexes (PEI) equal to or below 1.0 either in Constant Load (CL) or Variable Load (VL) applications.

In support of the U.S. DOE Pump Energy Conservation Standards, the North American Pump Manufacturers Association, The Hydraulic Institute, introduced its own Energy Rating (ER) Metric for clean water pumps which also requires certification of pump manufacturer's test laboratories. Compliant products have Energy Ratings (ER) above 1.0 either in Constant Load (CL) or Variable Load (VL) applications.

All Bell & Gossett Centrifugal Pump products already comply with U.S. Department of Energy Pump Energy Conservation Standards and Hydraulic Institute Standards for Energy Ratings. Specific PEI and ER data is shown on each pump performance curve where applicable and on the pump nameplate.

For more information, visit <http://bellgossett.com/e-series-pumps/#> or <http://er.pumps.org/ratings/home>

3450 RPM

MODEL NO.	PUMP SIZE	SUCTION & DISCHARGE SIZE INS. NPT	MOTOR H.P.
e9020S	1AAB	1	1
e9020T			1
e9021S			1.5
e9021T			1.5
e9022S			2
e9022T			2
e9023S			3
e9023T			3
e9025S	1.25AAB	1.25	1.5
e9025T			1.5
e9026S			2
e9026T			2
e9027S			3
e9027T			3
e9028T			5
e9029S	1.5AAB	1.5	1.5
e9029T			1.5
e9030S			2
e9030T			2
e9031S			3
e9031T			3
e9032T			5
e9033S	2AAB	2	2
e9033T			2
e9034S			3
e9034T			3
e9035T			5
e9036S	3AAB	3	3
e9036T			3
e9037T			5

1725 RPM

MODEL NO.	PUMP SIZE	SUCTION & DISCHARGE SIZE INS. NPT	MOTOR H.P.
e9001S	1AAB	1	0.25
e9002S			0.33
e9003S			0.5
e9003T			0.5
e9004S	1.25AAB	1.25	0.25
e9005S			0.33
e9006S			0.5
e9006T			0.5
e9007S	1.5AAB	1.5	0.25
e9008S			0.33
e9009S			0.5
e9009T			0.5
e9010S			0.75
e9010T			0.75
e9011S	2AAB	2	0.33
e9012S			0.5
e9012T			0.5
e9013S			0.75
e9013T			0.75
e9014S			1
e9014T			1
e9015S	3AAB	3	0.33
e9016S			0.5
e9016T			0.5
e9017S			0.75
e9017T			0.75
e9018S			1
e9018T			1

Single Phase - unit no. ending "S" 115/230 volt, single phase, 60 hertz, Open Drip Proof

Three Phase - unit no. ending "T" 208-230/460 volt, three phase, 60 hertz, Open Drip Proof

Series e-90

STANDARD PUMPS



Designed with preselected impeller diameters and motor horsepower sizes to offer better availability.

Pump Construction

Bronze Fitted / All Bronze
Standard Mechanical Seal
Maximum Working Pressure 175 psi

Motors



115/230 Volt, Single Phase or
208-230/460 Volt, Three Phase
60 Hertz
Open Drip proof

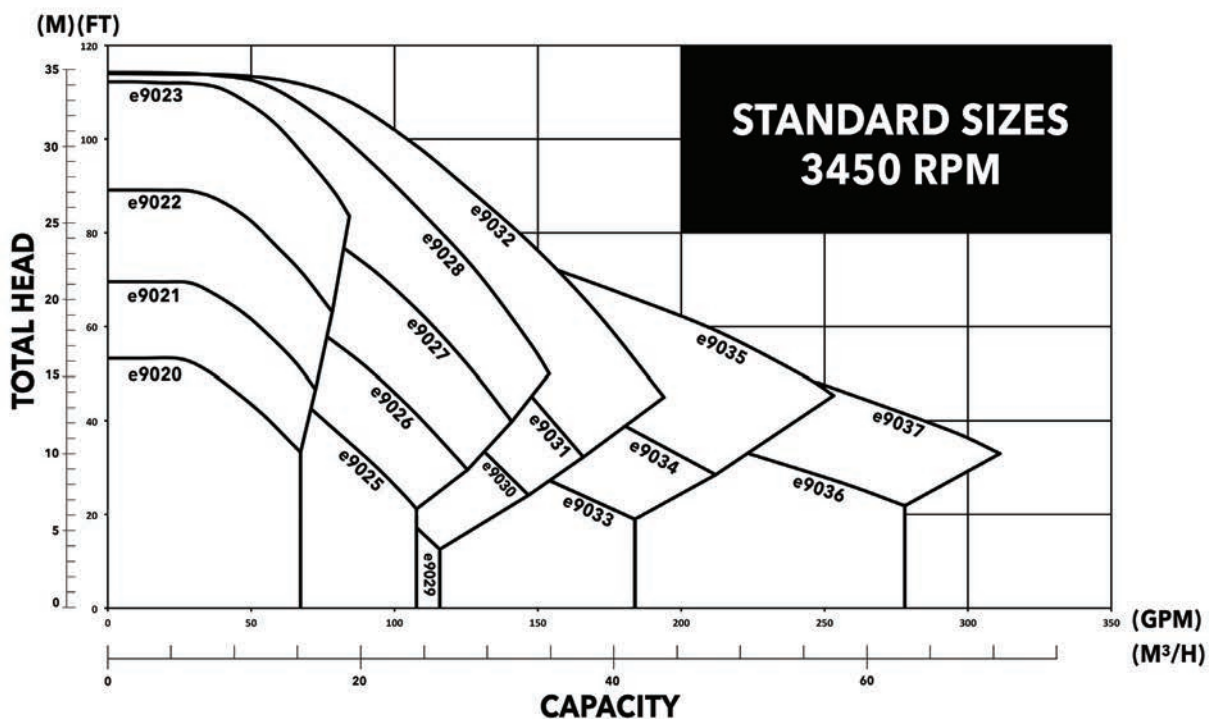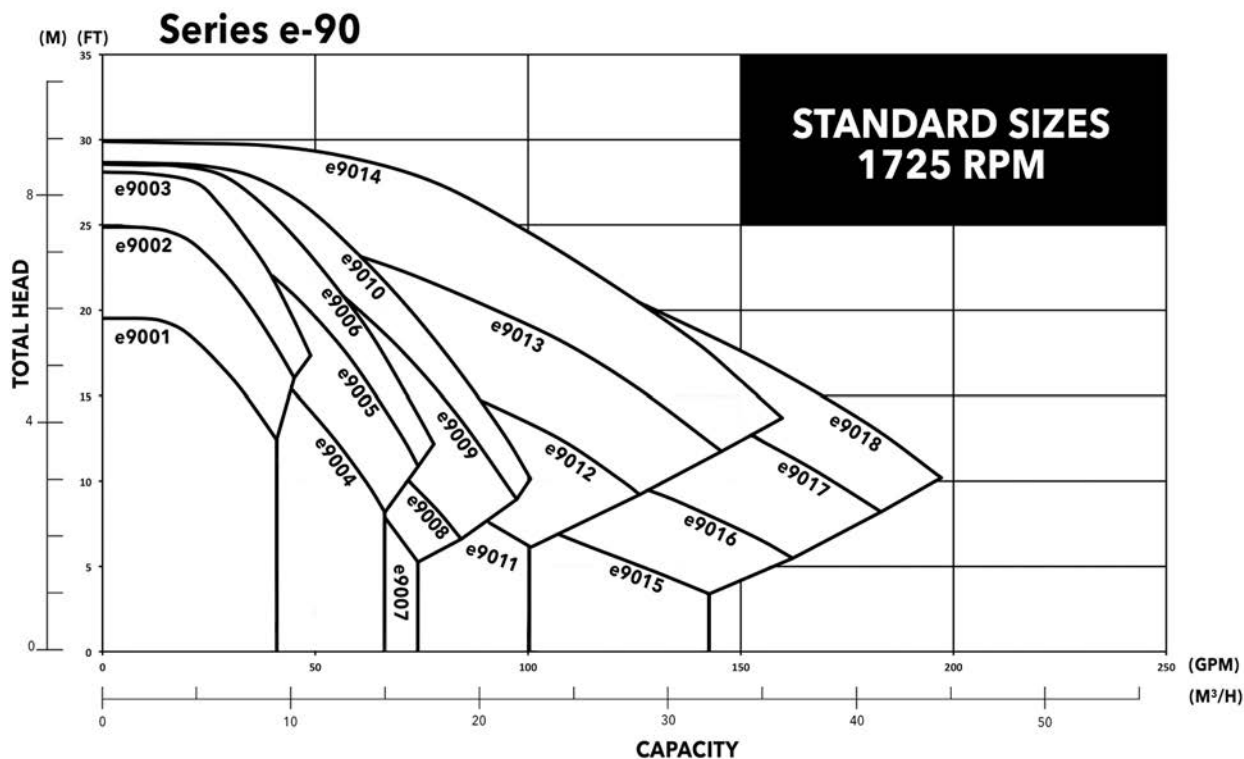

For more exact matches of required performance, consult the Built to Order Performance Curves.



Series e-90

1800 RPM SYNCHRONOUS SPEED

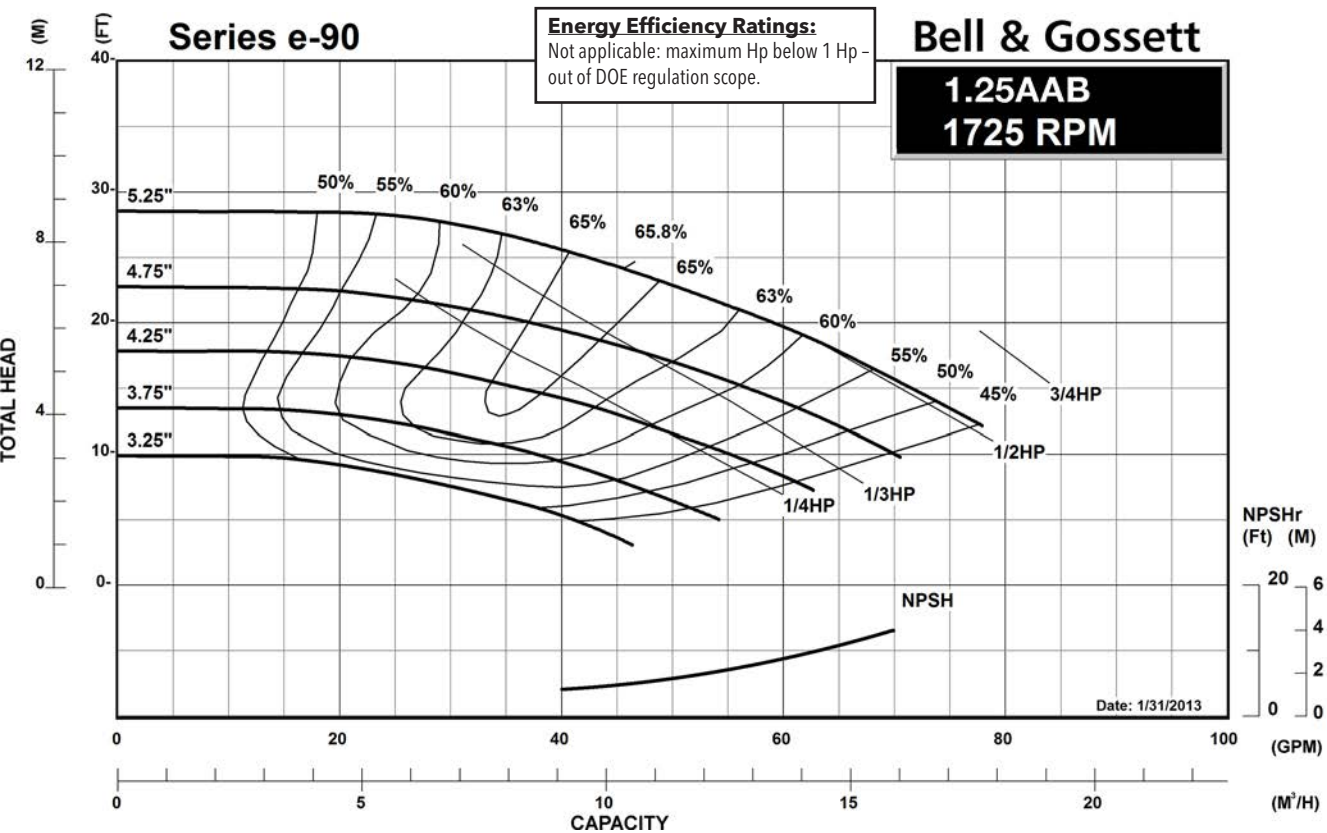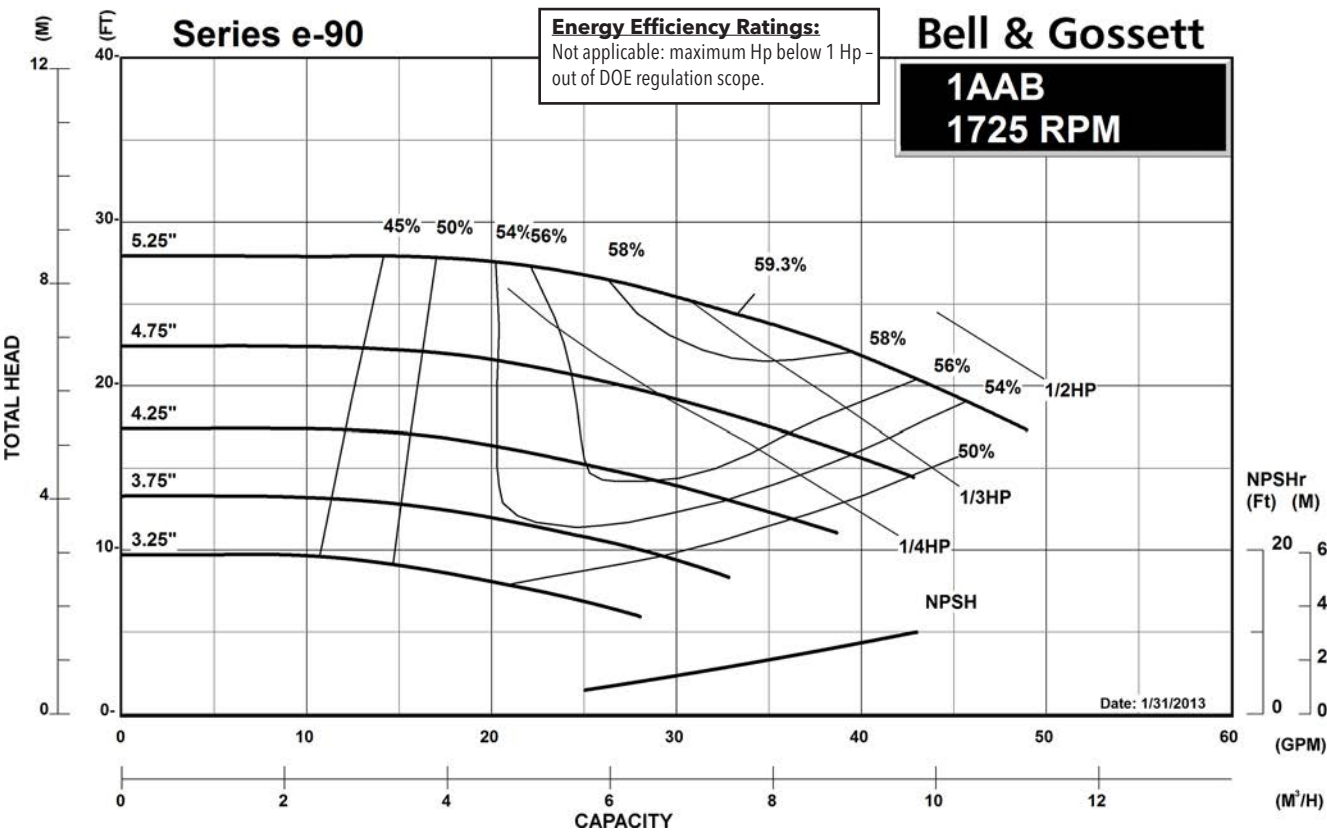



Series e-90



1800 RPM SYNCHRONOUS SPEED

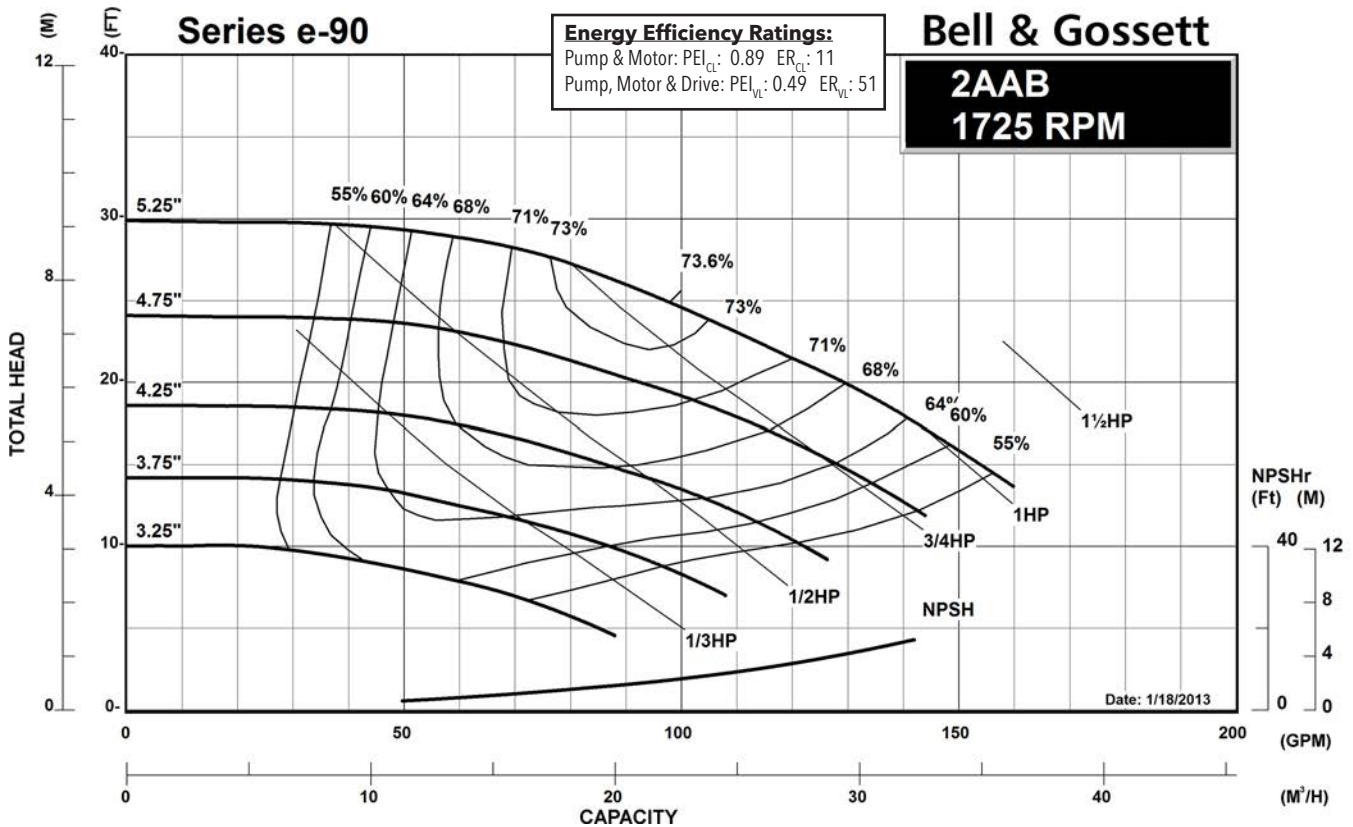
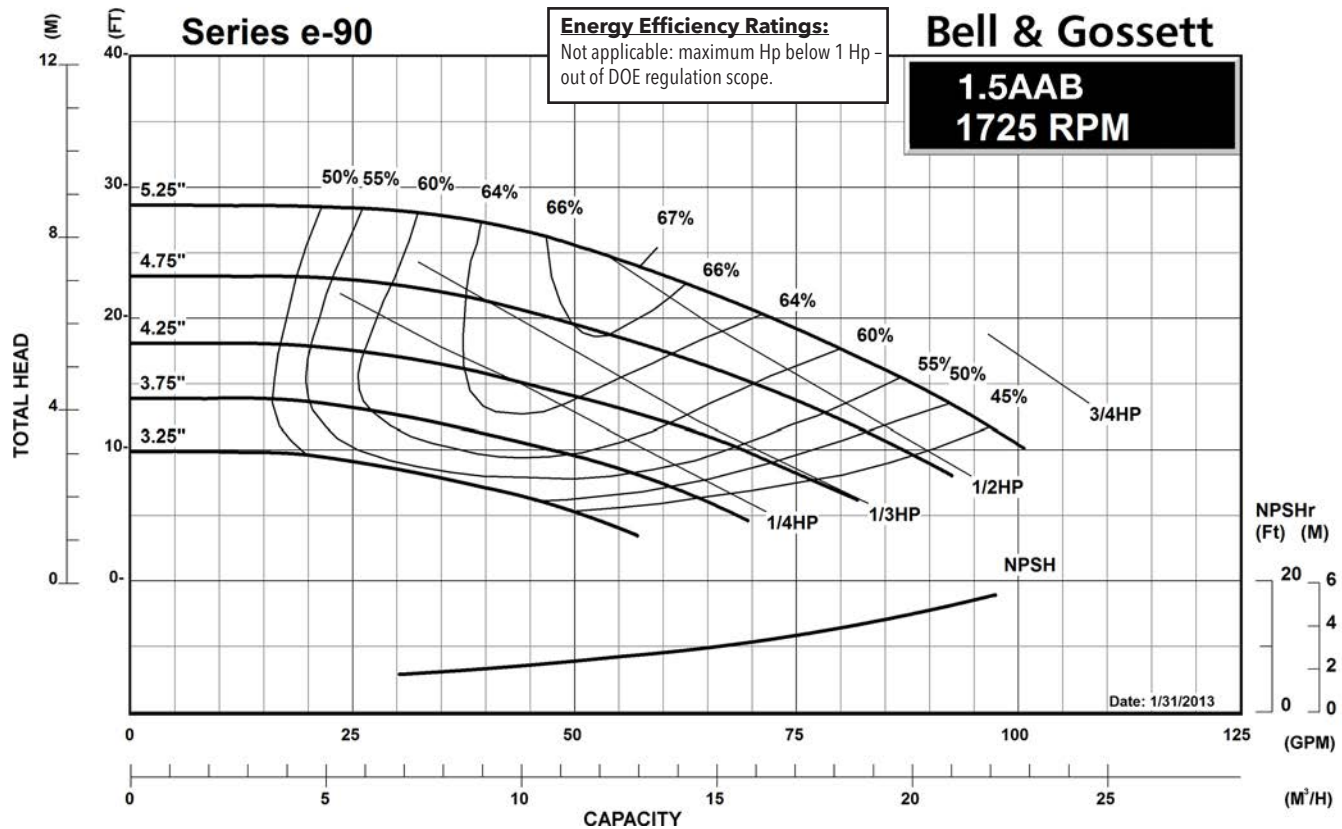




Series e-90



1800 RPM SYNCHRONOUS SPEED

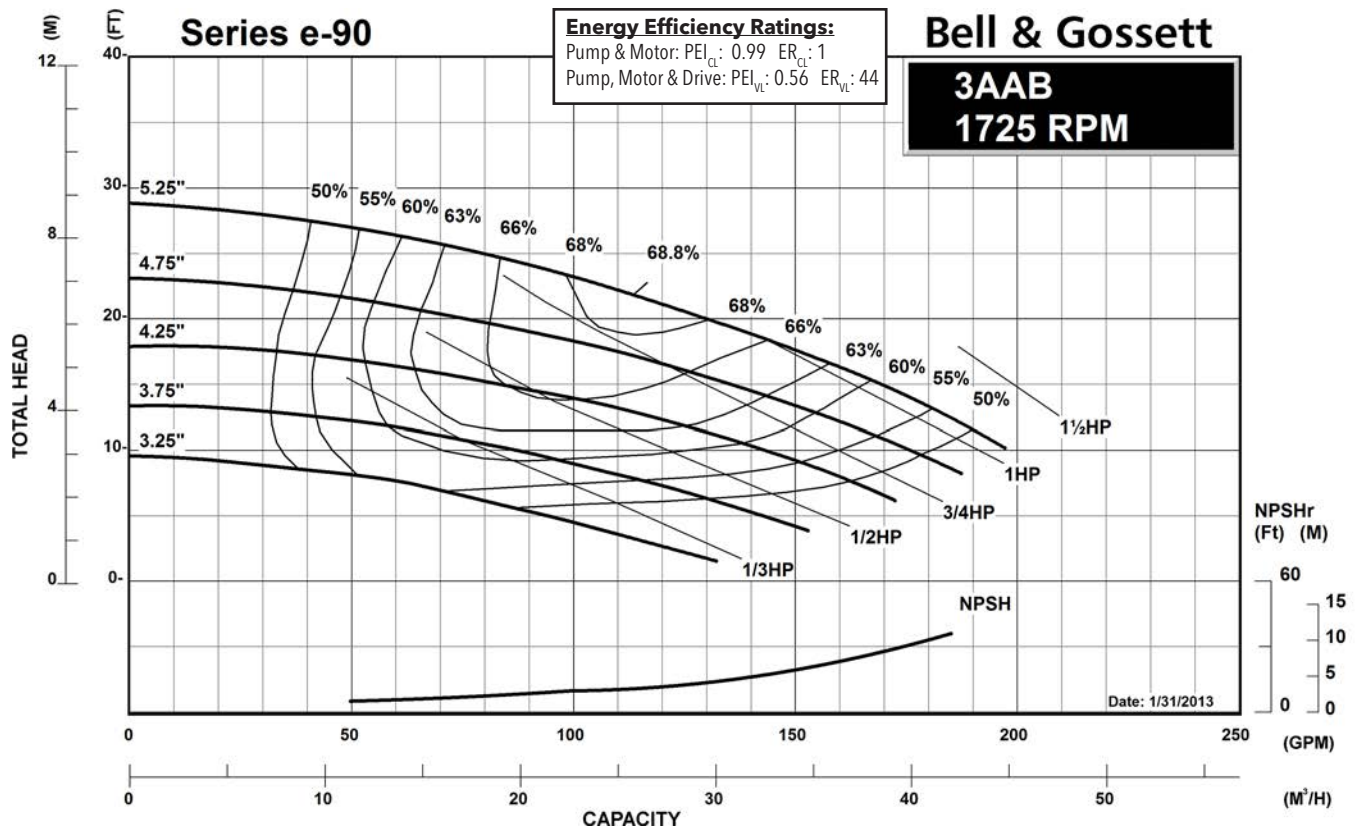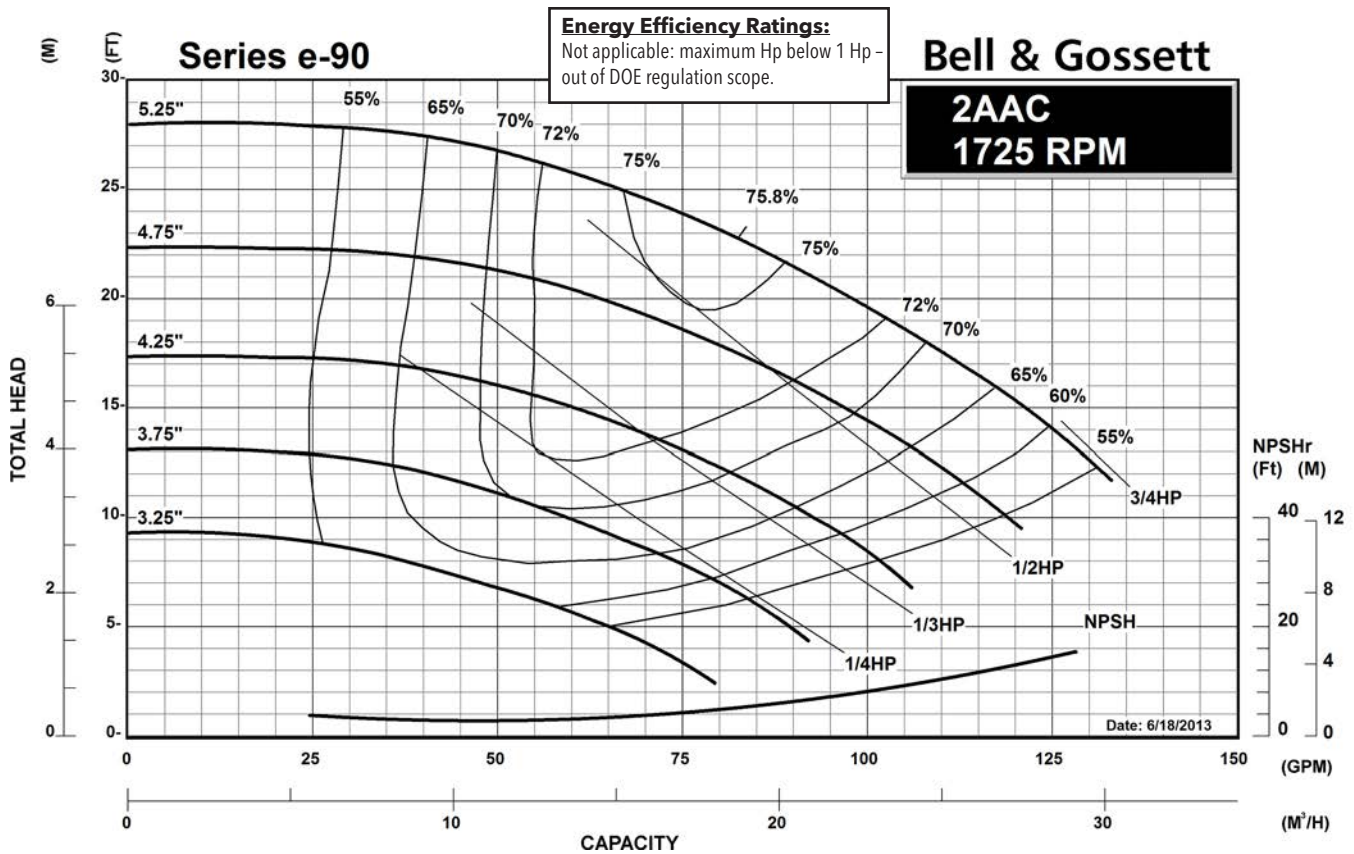

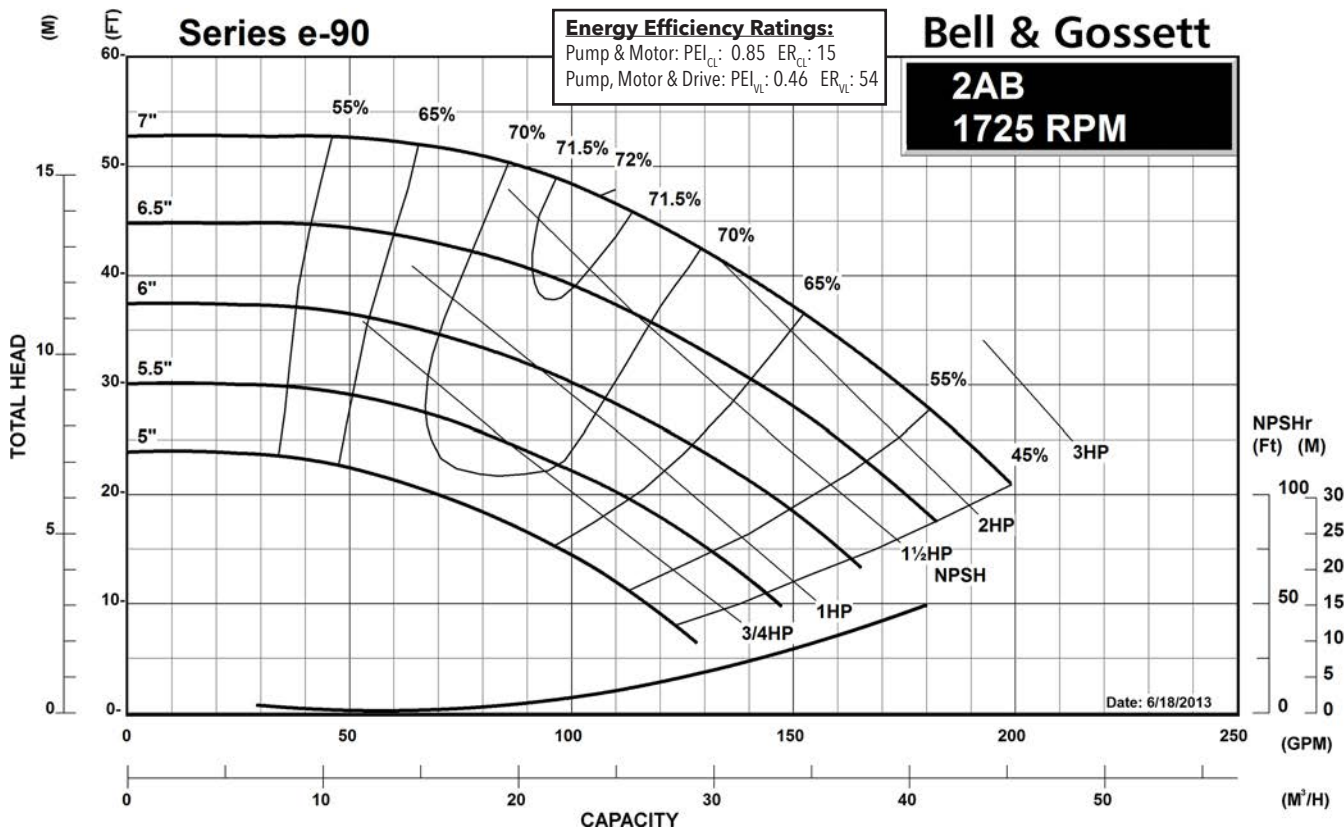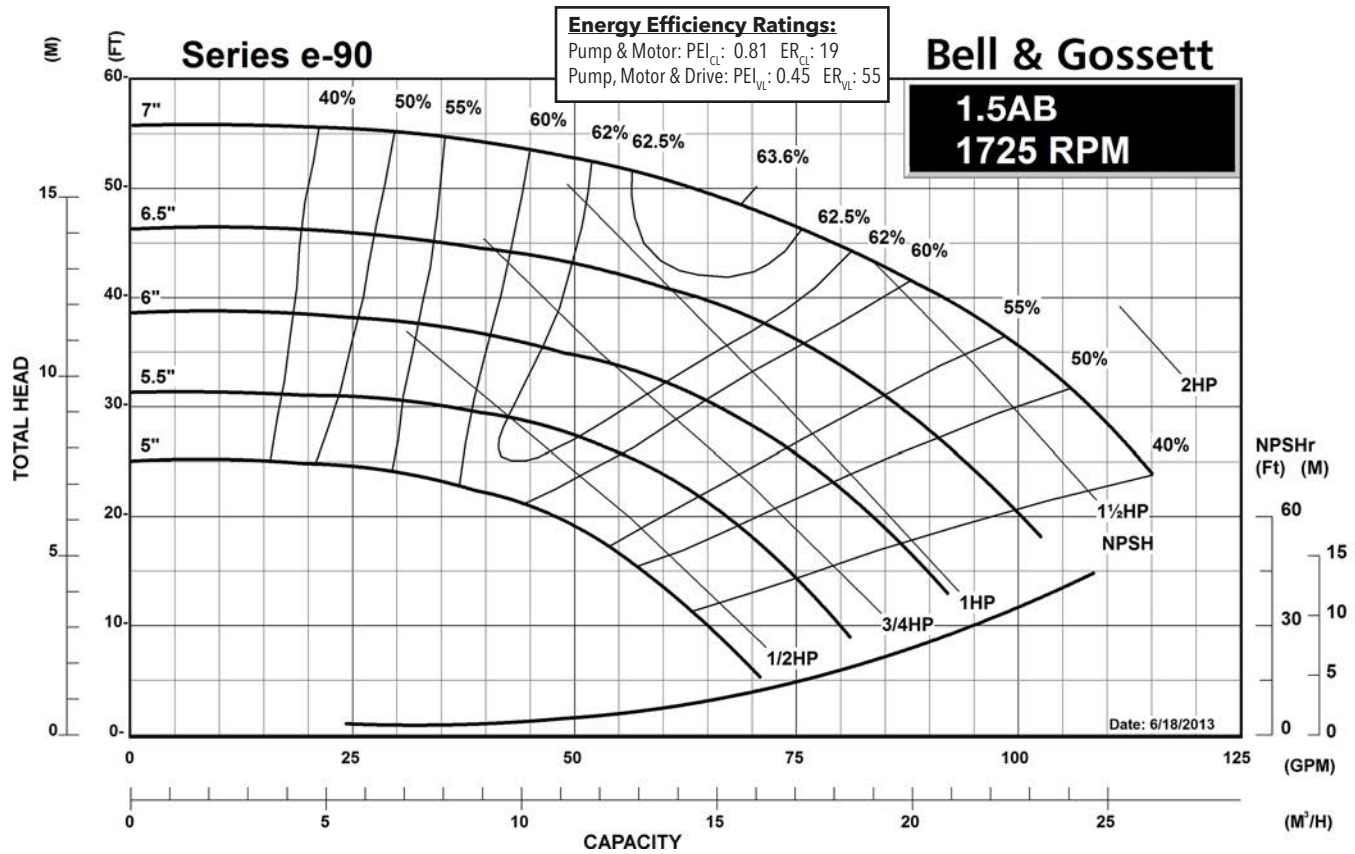

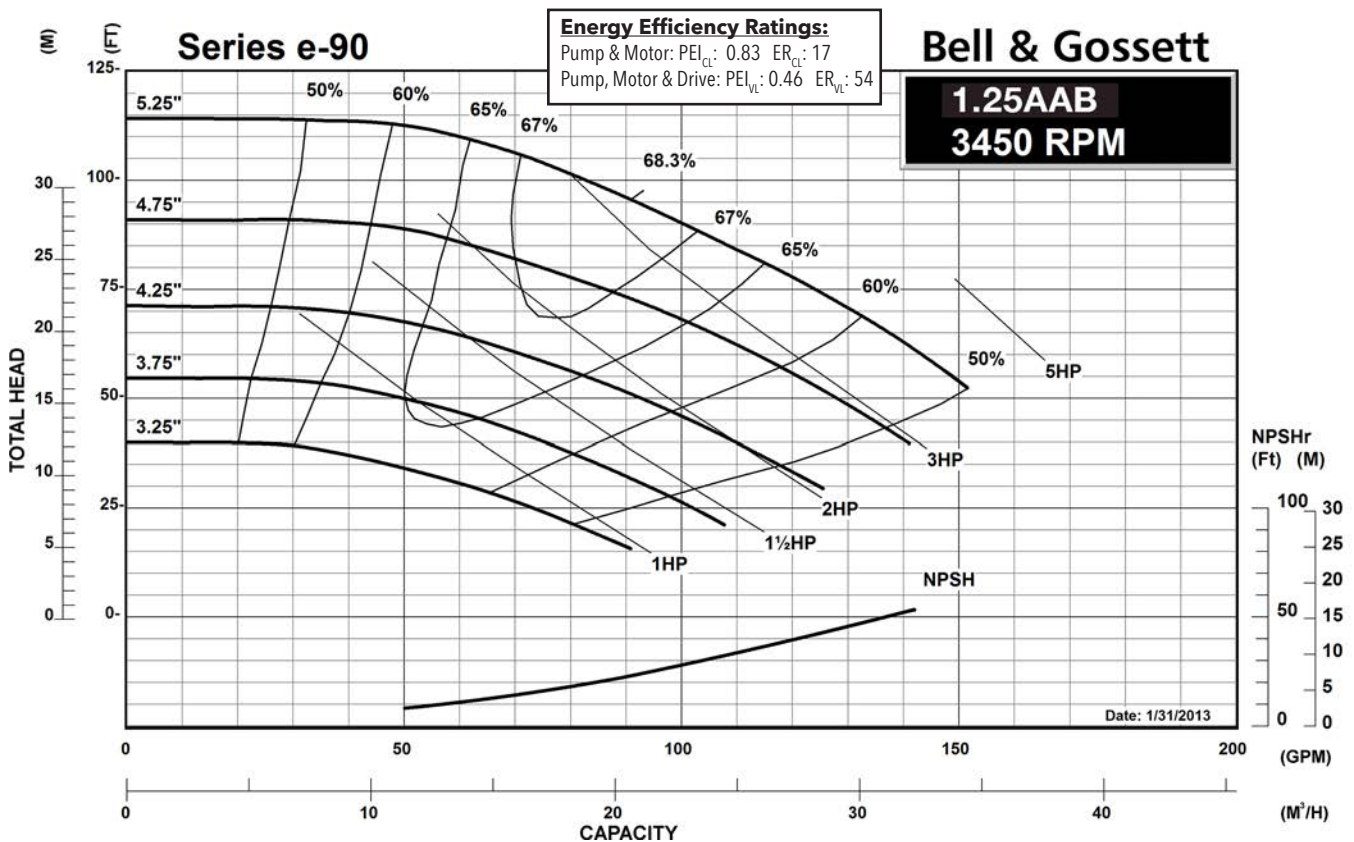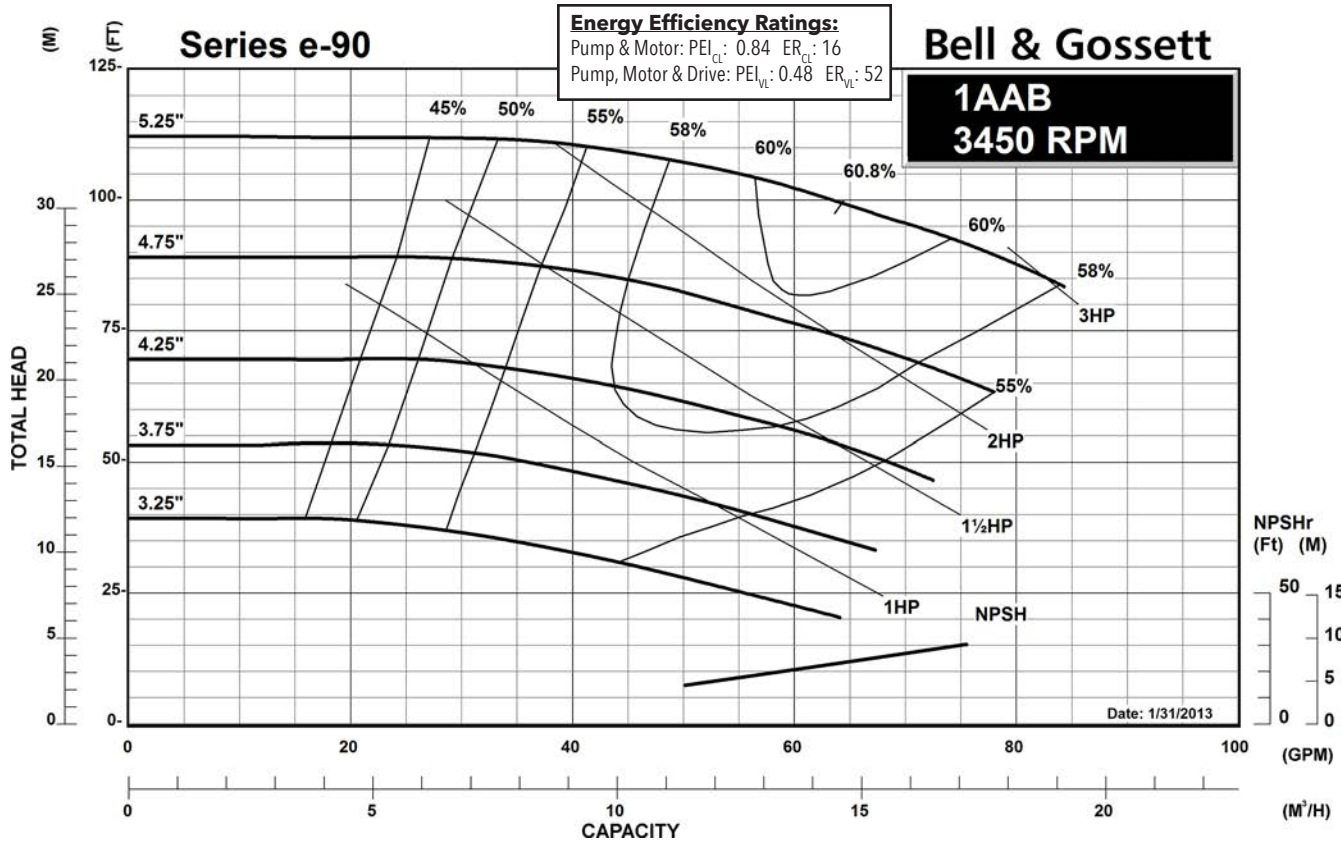

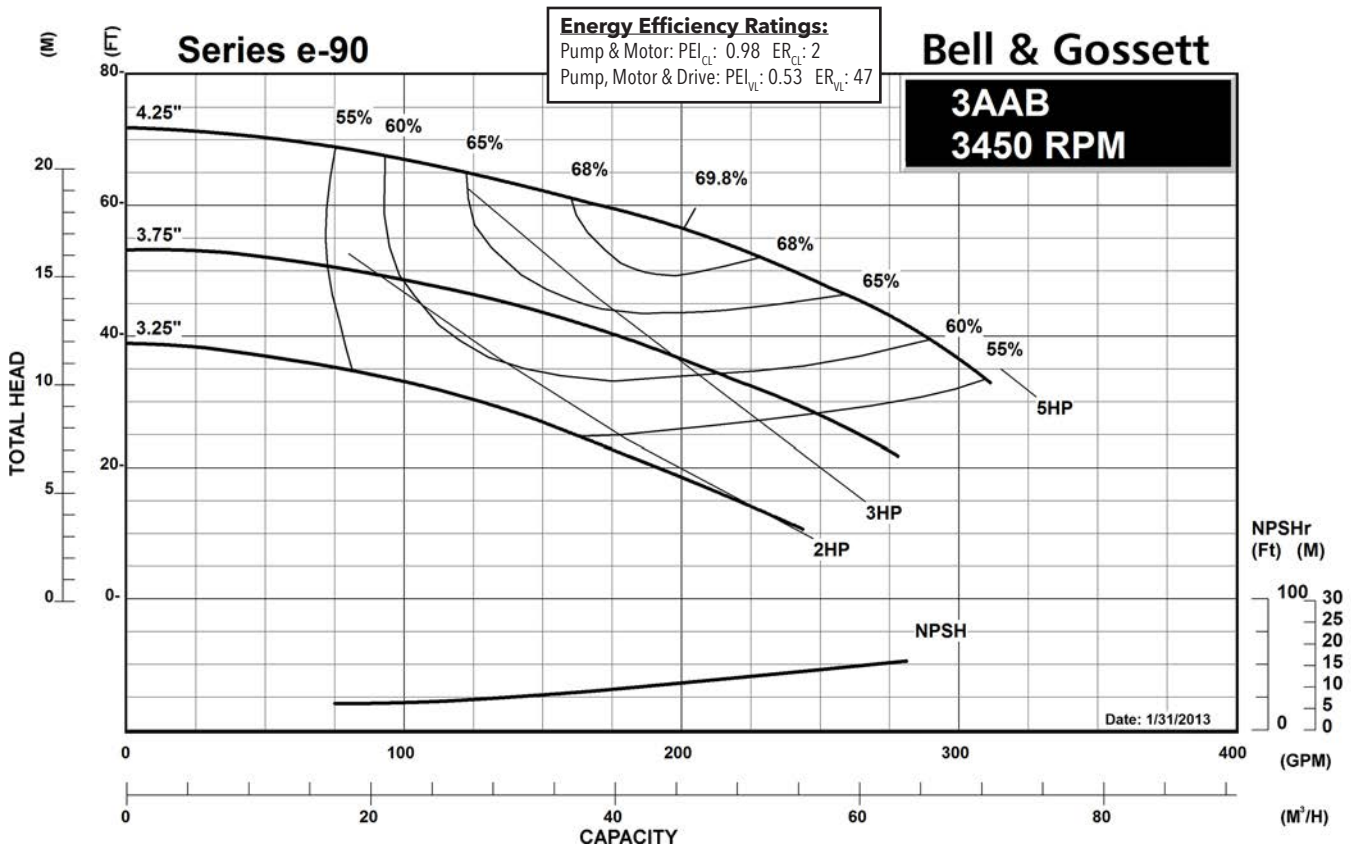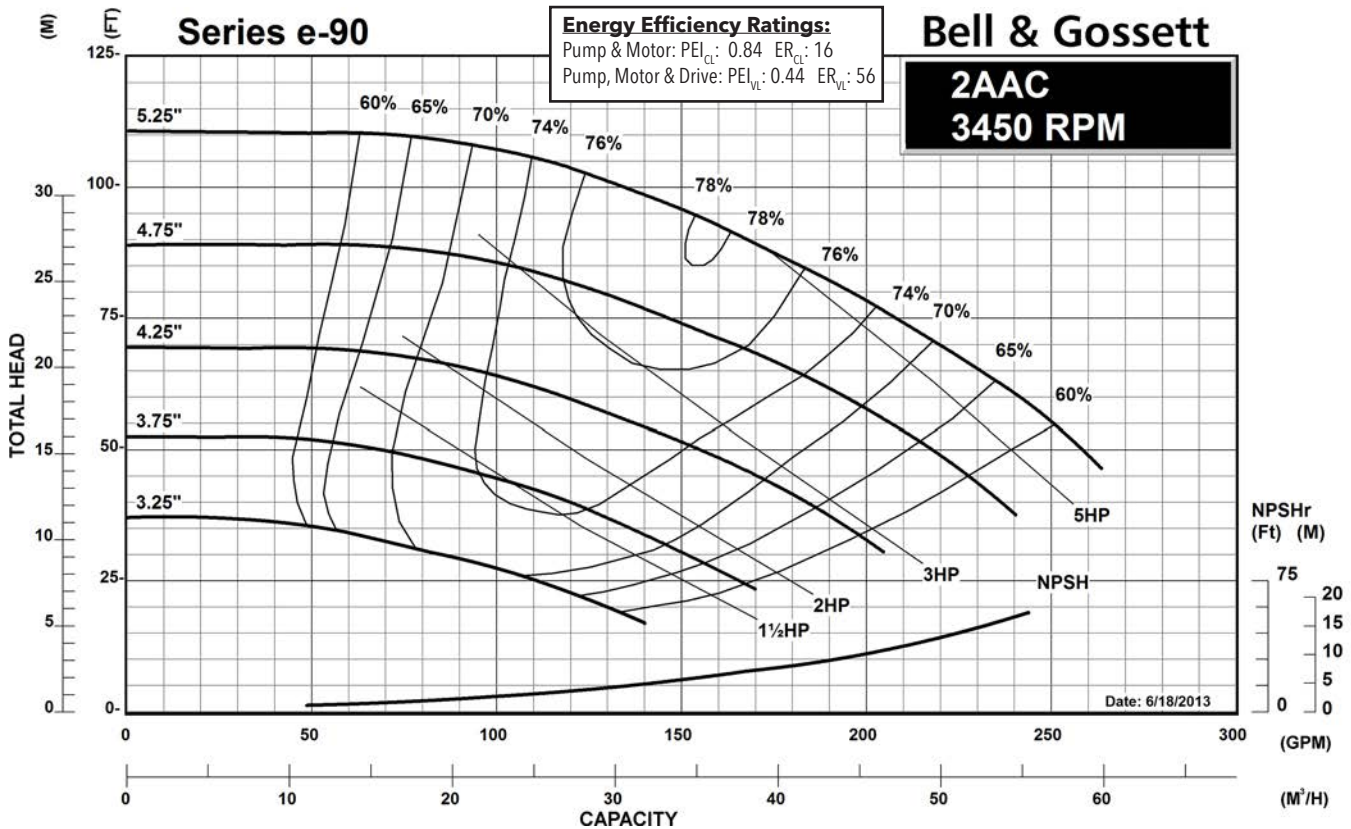

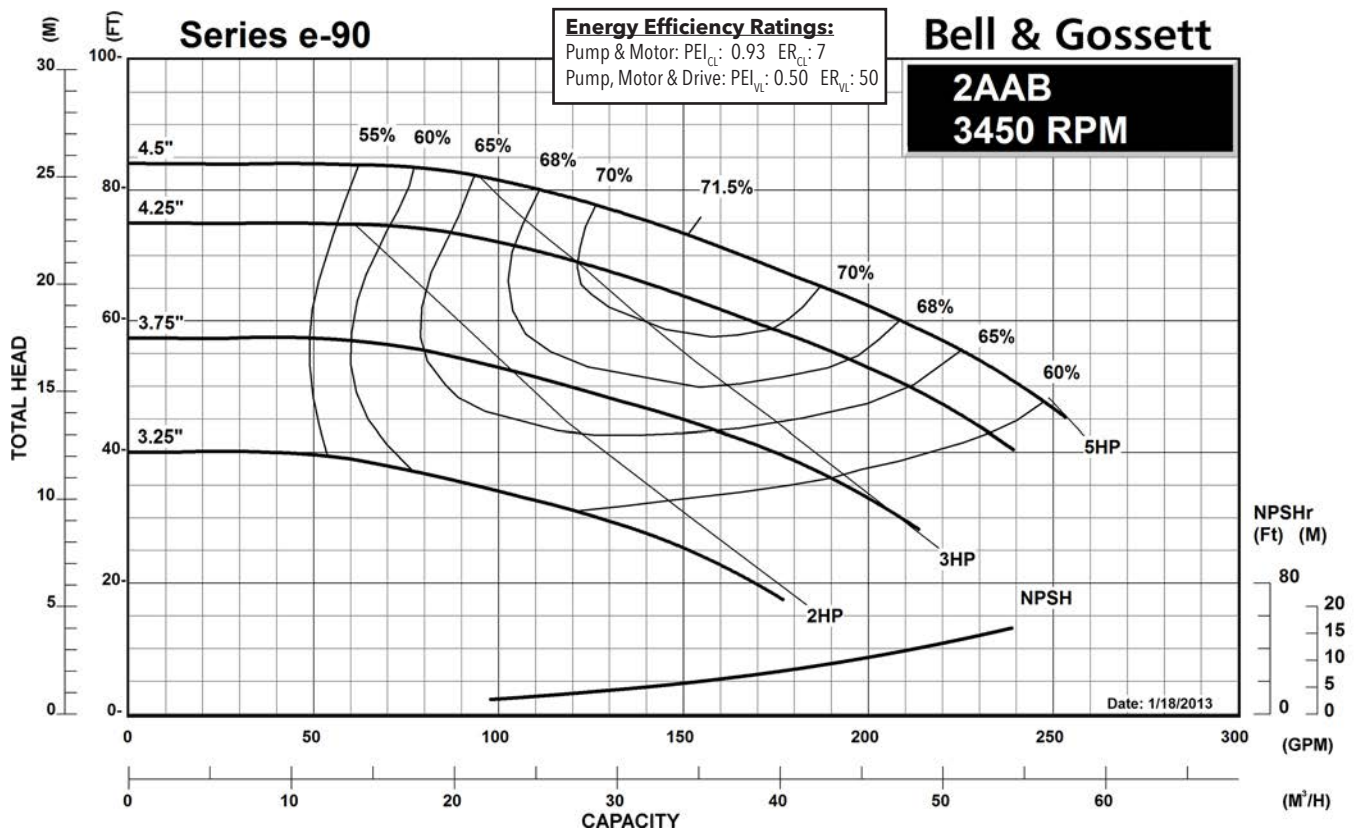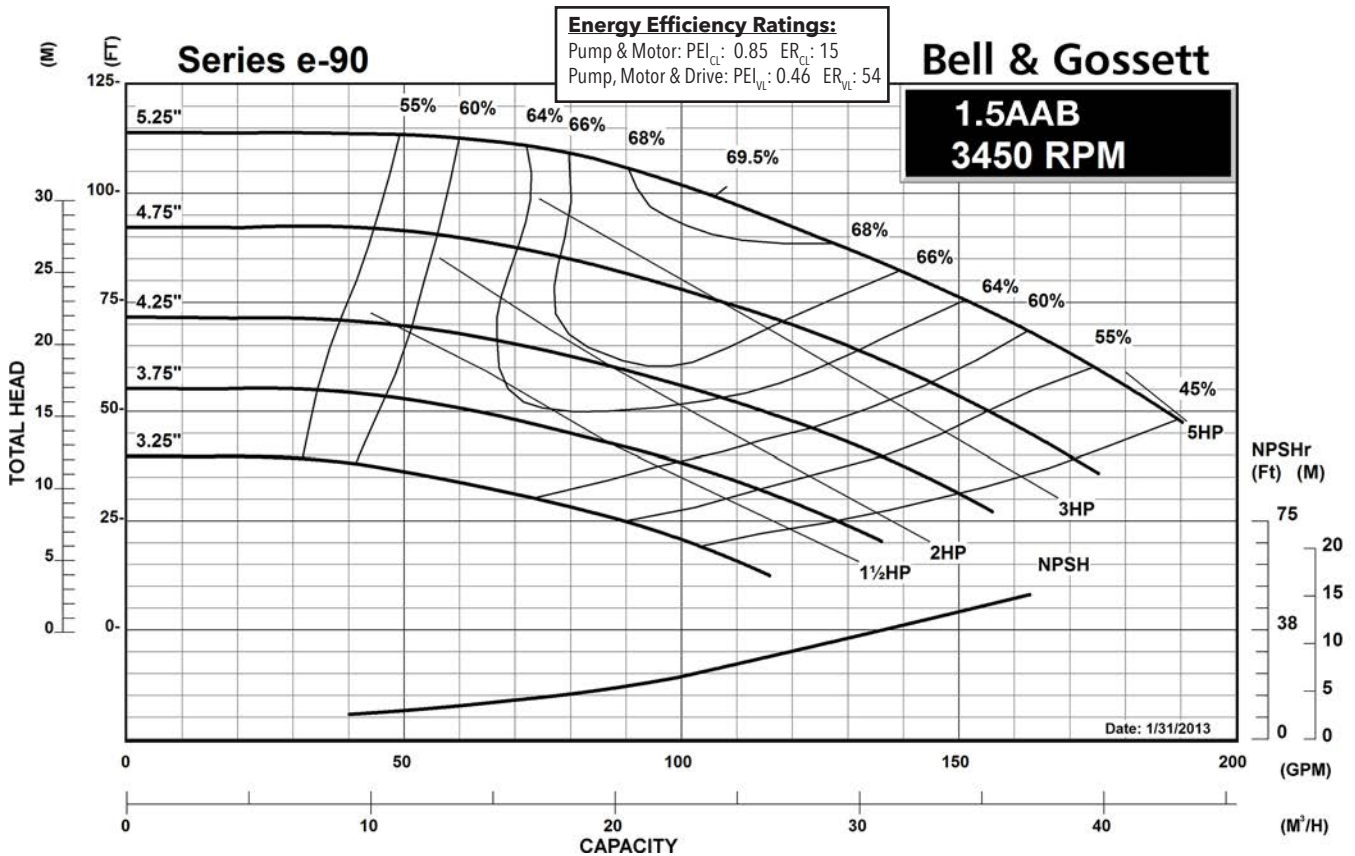

Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're a global team unified in a common purpose: creating advanced technology solutions to the world's water challenges. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. Our products and services move, treat, analyze, monitor and return water to the environment, in public utility, industrial, residential and commercial building services settings. Xylem also provides a leading portfolio of smart metering, network technologies and advanced analytics solutions for water, electric and gas utilities. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise with a strong focus on developing comprehensive, sustainable solutions.

For more information on how Xylem can help you, go to www.xyleminc.com

We value your feedback. Please take our 3 question survey at **bellgossett.com/survey** to let us know how we are doing.



Xylem Inc.
8200 N. Austin Avenue
Morton Grove, Illinois 60053
Phone: (847) 966-3700
Fax: (847) 965-8379
www.xylem.com/bellgossett

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2019 Xylem Inc. B-191C April 2019