



ProPak System

**Pre-piped Combination Battery Backup And Primary Pump Systems
Factory Assembled With 1-1/2" Schedule 40 PVC Pipe And Fittings**



Model 508/53 or 98 - Aquanot® Spin

- 508 pump rated 2,100 GPH @ 10'
- 53 pump rated 2,040 GPH @ 10'
- 98 pump rated 3,660 GPH @ 10'
- Self testing and battery monitoring system for peace of mind
- Intelligent multi-stage charger/controller with alarm, light indicator and warning system
- Made in the U.S.A. and Canada by Zoeller Company using a majority of U.S. and Canadian components
- 3 year limited warranty



Model 508/53, 63 or 98 - Aquanot® Fit Z Control® Enabled

- 508 pump rated 2,100 GPH @ 10'
- 53/63 pump rated 2,040 GPH @ 10'
- 98 pump rated 3,660 GPH @ 10'
- Self testing and battery monitoring system for peace of mind
- Intelligent multi-stage charger/controller with alarm, light indicator and warning system
- Built in Wi-Fi®
- Two independent, supervised switches
 - Heavy duty mechanical operating switch
 - High water sensor with alarm and pump run redundancy
- FREE Z Control® access
 - Email, text, and push notifications
 - Remote monitoring and control
- Made in the U.S.A. and Canada by Zoeller Company using a majority of U.S. and Canadian components
- 3 year limited warranty on system with Models 53 and 98 pumps
- 5 year limited warranty on system with Model 63 pump



Model 508/63 - Aquanot® Active Z Control® Enabled

The Industry's Premium System


- 508 pump rated 2,100 GPH @ 10'
- 63 pump rated 2,040 GPH @ 10'
- Self-testing and multi-stage battery charging
- Early warning diagnostics and alert notifications
- FREE Z Control® access
 - Email, text, and push notifications
 - Remote monitoring and control
- Made in the U.S.A. by Zoeller Company
- 5 year limited warranty

Also Available:
507-0013: entry level
507/73 combo




Trusted. Tested. Tough.®

zoellerpumps.com 800-928-7867
3649 Cane Run Road, Louisville, KY 40211 USA



Search: "Z Control"




TOTAL DYNAMIC HEAD FLOW PER MINUTE

DC PUMPS @12.7 VOLTS

MODEL		507		508	
Feet	Meters	Gal	Liters	Gal	Liters
5	1.5	22	83	43	163
10	3.0	13	49	35	132
15	4.6	-	-	27	102
Shut-off Head		14.5 ft. (4.4 m)		22 ft. (6.7 m)	

NOTE: Above performance chart based upon actual performance achieved with a 12 Volt deep-cycle battery. Some manufacturers publish performance data based upon D.C. Pump testing according to Marine Industry standards which can reflect a performance of 40% - 80% higher than actual battery powered performance.

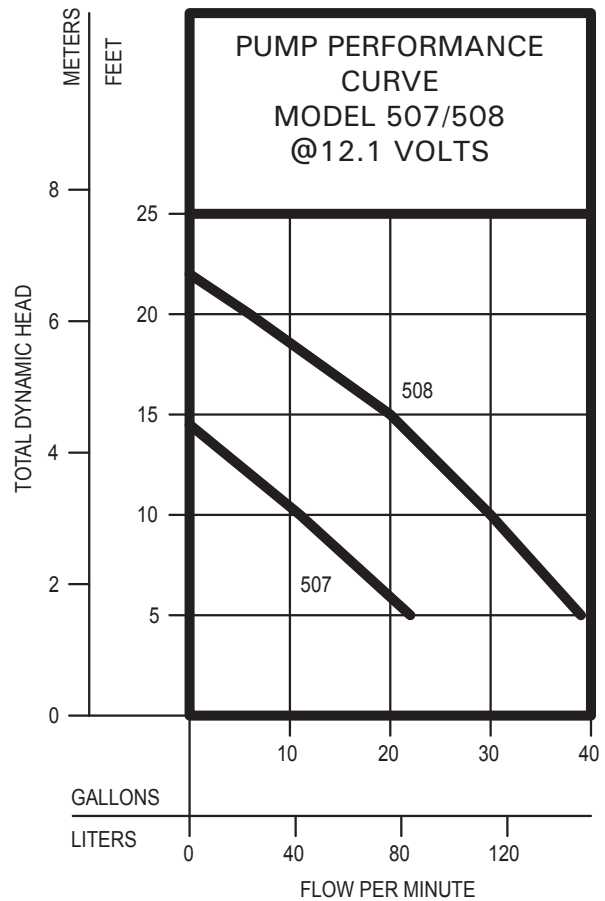


153036a

ProPak Item	Controller	73	53	98	63	Z Control®
507-0013	Basement Sentry I	X				
508-0006	Spin		X			
508-0007	Spin			X		
508-0015	Fit		X			X
508-0016	Fit			X		X
508-0020	Fit				X	X
508-0013	Active				X	X

AC PUMPS

TOTAL DYNAMIC HEAD/FLOW PER MINUTE EFFLUENT AND DEWATERING

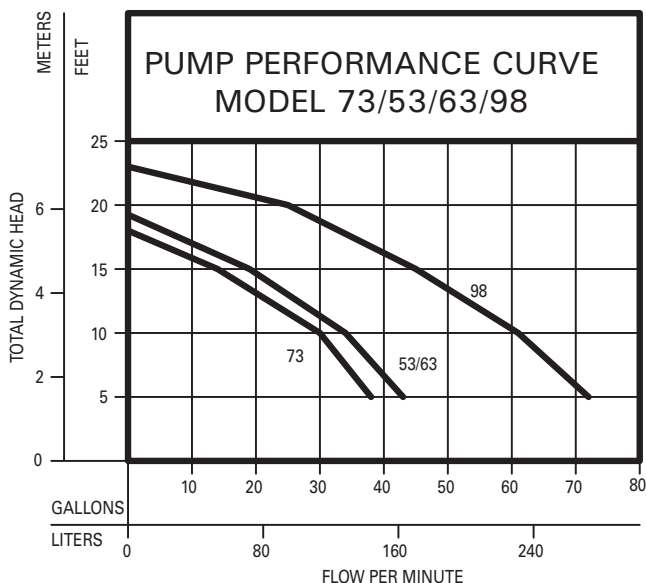

153798b

MODEL		73		53/63		98	
Feet	Meters	Gal.	Liters	Gal.	Liters	Gal.	Liters
5	1.5	38	144	43	163	72	273
10	3.0	30	114	34	129	61	231
15	4.6	14	53	19	72	45	170
20	7.1	--	--	--	--	25	95
Shut-off Head:		18 ft.(5.5 m)		19.25 ft.(5.9 m)		23 ft.(7.0 m)	

153798b

See FM2897 (Model 73), FM2778 (Model 53), FM2899 (Model 63) or FM2779 (Model 98) for complete pump specifications.



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

© Copyright 2019 Zoeller® Co. All rights reserved.

502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | zoellerpumps.com