

STA-RITE® 70 GPM Series

Cast Iron



Precision-engineered, quality-built and rugged 70 GPM Series submersibles may be used in wells 4" or larger. Maximum outside diameter 3-7/8".

APPLICATIONS

Water systems...for residential, industrial, commercial, multiple housing and farm use.

SPECIFICATIONS

Discharge: Cast iron, ASTM A48 Class 30

Pump Bowls: Cast iron, ASTM A48 Class 30

Impellers: Polycarbonate with brass insert

Collets: Stainless steel, AISI 416

Upthrust Bearing: Bronze, ASTM B255 Type II

Pump Shaft: Stainless steel, AISI 416

Bowl and Intake Bearings: Nitrile (proprietary spec.)

Lead Guard: Stainless steel, AISI 430

Intake Bracket: Cast iron, ASTM A48 Class 30

Screen: Stainless steel, AISI 430

Pump/Motor Coupling: Stainless steel, AISI 416

FEATURES

Discharge: Heavy-duty cast iron construction provides smooth water passage to column pipe. NPT threads standard.

Bowl and Intake Bearings: Fluted, cutless rubber type assures superior abrasive-handling characteristics, located at each stage.

Polycarbonate Impellers: Glass-reinforced polycarbonate resists abrasives and provides smooth water passages for minimum friction loss. Ensures optimum pump efficiency.

Pump Bowls: Highly efficient hydraulic design...threaded bowl design in gray cast iron.

Upthrust Bearing: Bronze upthrust bearing provides positive momentary upthrust protection during start-up.

Intake Bracket: Efficient hydraulic design minimizes entrance losses, ensuring maximum pump performance.

Stainless Steel Pump Shaft: Precision straightened shaft is corrosion-resistant stainless steel.


Pump/Motor Coupling: Stainless steel for maximum corrosion resistance...precision machined to ensure accurate alignment and power transfer.

Intake Screen: Stainless steel material offers maximum corrosion resistance...protects against damaging solids entering the pump assembly.

STA-RITE® 70 GPM Series

Cast Iron

PUMP PERFORMANCE: 70 GPM

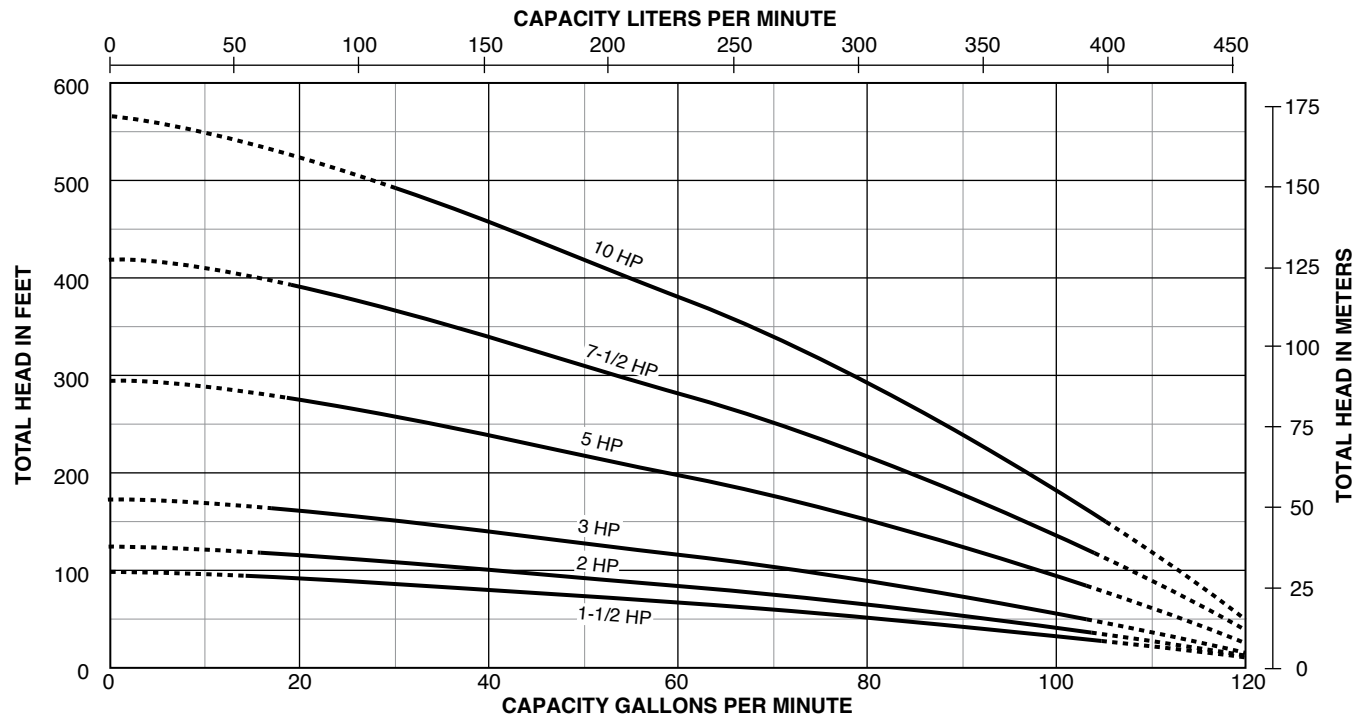

Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.

STA-RITE® 70 GPM Series

Cast Iron


ORDERING INFORMATION

MOTOR TYPE	HP	STGS.	PH	VOLT	PUMP END			MOTOR		CONTROL BOX	
					CATALOG NUMBER	LENGTH INCHES*	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*
2 WIRE	1-1/2	4	1	230	L70F4	20-25/32	26	P42B0015A2	29		
	1-1/2	4	1	230	L70F4	20-25/32	26	P43B0015A2	27	SMC-CR1521	7
	1-1/2	4	3	230	L70F4	20-25/32	26	P43B0015A3	23		
	1-1/2	4	3	460	L70F4	20-25/32	26	P43B0015A4	23		
3 WIRE	2	5	1	230	L70G4	24-1/16	31	P43B0020A2	31	SMC-CR2021	7
	2	5	3	230	L70G4	24-1/16	31	P43B0020A3	27		
	2	5	3	460	L70G4	24-1/16	31	P43B0020A4	27		
	3	7	1	230	L70H4	30-5/8	39	P43B0030A2	40	SMC-CR3021	7
	3	7	3	230	L70H4	30-5/8	39	P43B0030A3	32		
	3	7	3	460	L70H4	30-5/8	39	P43B0030A4	32		
	5	12	1	230	L70J4	47-1/32	60	P43B0050A2	70	SMC-CR5021	8
	5	12	3	230	L70J4	47-1/32	60	P43B0050A3	55		
	5	12	3	460	L70J4	47-1/32	60	P43B0050A4	55		
	7-1/2	17	3	230	L70K4	63-7/16	81	P43B0075A3	70		
	7-1/2	17	3	460	L70K4	63-7/16	81	P43B0075A4	70		
	10	23	3	460	L70L4	83-1/8	106	P43B0100A4	70		

*Length and Weight are approximate.

NOTE: Pump end and motor purchased separately.

OUTLINE DIMENSIONS

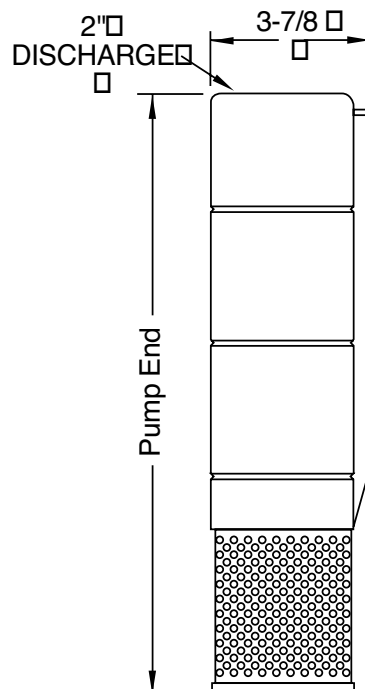

For lengths,
refer to Ordering
Information tables.

Dimensions (in inches) are for estimating purposes only.

STA-RITE® 70 GPM Series

Cast Iron

70 GALLONS PER MINUTE										PUMP PERFORMANCE (Capacity in gallons per minute)																
HP	PSI	PUMPING DEPTH IN FEET																								
		20	40	60	80	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550		
1-1/2	0	—	92.5	70.0	40.0																					
	20	61.5	31.0																							
	30	25.0																								
	40																									
	50																									
	60																									
2	0	—	100.0	85.0	64.0	40.0																				
	20	79.0	57.0	32.5																						
	30	52.5	28.0																							
	40	25.0																								
	50																									
	60																									
3	0	—	104.0	98.0	86.0	73.5	52.5	31.0																		
	20	95.0	82.5	68.0	52.0	35.0																				
	30	81.0	66.0	49.0	32.0																					
	40	64.0	47.0	29.0																						
	50	43.0	25.5																							
	60	22.0																								
5	0	—	—	—	106.0	99.0	91.0	82.0	72.0	60.0	47.5	35.0	21.0													
	20	—	104.0	97.0	90.5	83.5	74.0	62.0	49.5	37.0	23.0															
	30	102.5	96.0	88.5	82.5	74.5	63.0	50.0	38.0	25.0																
	40	95.0	87.5	81.5	73.5	64.0	51.5	39.0	26.0																	
	50	86.0	80.0	72.0	62.0	52.0	39.5	27.0																		
	60	78.0	70.0	61.0	50.0	40.0	27.5																			
7-1/2	0	—	—	—	—	108.0	103.0	97.0	91.0	85.0	78.0	75.0	62.5	54.0	45.5	35.5										
	20	—	—	108.0	102.5	97.5	92.0	86.0	80.0	76.0	64.9	56.0	47.0	37.5	27.5											
	30	—	107.5	102.0	97.0	92.5	87.0	80.5	76.5	65.0	56.5	47.5	38.0	28.0												
	40	107.0	101.5	96.5	92.0	87.5	81.5	77.0	65.5	57.0	48.0	38.5	29.0													
	50	101.0	96.0	91.0	86.0	82.0	77.0	66.0	57.5	48.0	39.0	30.0	20.0													
	60	95.0	90.0	85.0	80.5	77.5	66.5	57.5	49.0	40.0	31.0	21.0														
10	0	—	—	—	—	—	110.0	106.0	102.0	97.5	93.0	88.0	84.0	79.0	74.9	68.0	62.0	55.0	48.0	42.5	36.0					
	20	—	—	—	110.0	107.0	102.5	98.5	93.5	89.0	85.0	80.0	75.5	69.5	62.5	56.0	49.5	43.0	37.0	31.0						
	30	—	—	109.5	106.5	103.0	99.0	94.0	89.5	85.0	80.5	76.0	70.0	63.0	57.0	55.0	43.5	37.5	31.5							
	40	—	109.0	106.0	102.5	99.5	95.0	90.0	85.5	81.0	76.5	70.5	64.0	57.5	51.0	44.0	38.0	32.0								
	50	108.0	105.5	102.0	98.5	95.0	90.0	86.0	81.5	76.5	71.0	64.5	57.5	51.5	44.5	38.0	32.5									
	60	104.5	101.5	98.0	94.0	91.0	86.5	82.0	77.0	72.0	65.0	58.0	52.0	46.0	38.5	32.5										

CAUTION: DO NOT use pump at flow rates indicated by the symbol '—'. To do so can cause premature failure of unit. Pump warranty void when failure occurs under these conditions.

Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.



US: 293 WRIGHT STREET, DELAVAN, WI 53115 WWW.STA-RITE.COM PH: 888-782-7483 ORDERS FAX: 800-426-9446
CANADA: 490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO N1T 0A5 PH: 800-363-7867 ORDERS FAX: 888-606-5484
Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.