Little GIANT®

4-MD



Features


- Thermally protected, open, fan-cooled motor
- Ball bearings
- 6' power cord with 3-prong plug (no plug on 230V)
- Specific gravity to 1.1
- Fluid temperature to 150°F
- Ambient air temperature to 77°F **NOTE:** Consult your local distributor or the factory for applications with higher ambient temperatures, specific gravities and viscosities.

Construction

- Volute Glass-filled polypropylene
- Housing Glass-filled polypropylene
- Impeller Glass-filled polypropylene and ceramagnet "A" (barium ferrite)
- Shaft Titanium
- Thrust Washers Titanium
- O-Ring Nitrile

The Little Giant MD series features leakproof, seal-less magnetic drives and are designed for in-line, non submersible use. Volute and magnet housing are glass-filled polypropylene for excellent chemical resistance. Impeller is glass-filled polypropylene and ceramagnet "A" (barium ferrite). Shaft and thrust washers are titanium for excellent wear and trouble-free service. Pumping heads are easily rotated, cleaned or serviced with no special tools required. Spindle shaft is supported at both ends to prevent impeller damage during start-up and stop of pump.


4-MD

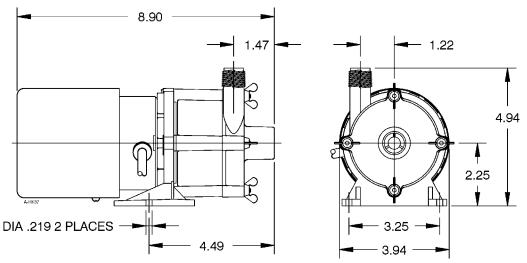


NOTE: Designs and dimensions may vary for various reasons (i.e. type of motor). This information should be used as general guide rather than an unqualified guarantee. Specifications are subject to change without prior notice.

Specifications

Model	Item	Intake	Discharge							Pe	erforman	ce (GPH	l @ Hea	d)	Shu	t Off	Power	Weight
No.	No.	Size	Size	Listing(s)	HP	Volts	Hertz	Amps	Watts	1'	3'	6'	9'	15'	Feet	PSI	Cord (ft.)	(lbs.)
4-MD	582002	1/2" FNPT	1/2" MNPT	UR/C-CSA	1/12	115	60	2.4	213	690	660	600	545	390	23.7	10.3	6	8.50
4-MD	582012	1/2" FNPT	1/2" MNPT	UR/C-CSA	1/12	230	60	1.4	212	690	660	600	545	390	23.7	10.3	6	8.50
4-MD	582098	1/2" FNPT	1/2" MNPT		Pump I	lead Less	s Motor											2.17



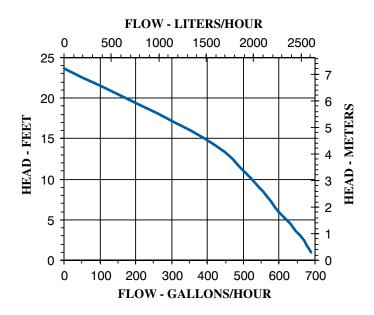

Replacement Parts

ITEM	PART NO.	DESCRIPTION
Α	183070	Volute
В	924007	O-ring
С	921067	Thrust washer
D	182137	Impeller
Ш	182056	Shaft
F	182005	Housing
1	920003	Wing nut
2	911403	Stud, collared
3	182602	Drive magnet
4	180031	Mounting bracket

NOTE: Parts A-F contact fluid

PO Box 12010 • Oklahoma City, OK 73157
Phone: 800.701.7894 • Fax: 800.701.8046
E-mail: customerservice@littlegiant.com