





Sump Pump

- Basement Sump
- Dewatering




Patent No. 8,591,198




System Specifications

Typical Applications	Basement sump Dewatering
Maximum Capacity	Up to 68 GPM
Maximum Head	Up to 25'
Electrical Data	115 V, 1 Ø, 4.5 FLA, 60 Hz
Motor Data	⅓ HP, 3450 RPM
Recommended Minimum Basin Size	18" x 24"
Automatic Operation Manual Operation	i: Ion Digital Level Control (standard) SPI: Vertical float M: Manual
Materials of Construction	Cast iron & stainless steel
Impeller	Thermoplastic vortex
Power Cord	10' Standard
Discharge Size	11/2" NPT
Solids Handling	1/2″

Pump Dimensions

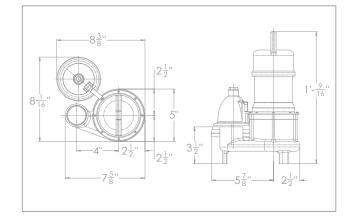

Pump Performance



Features

- Energy efficient motor
- Carbon ceramic mechanical seal
- Thermal overload protection
- Piggy back lon® digital level control switch has no moving parts (standard)
- Stainless steel screen prevents debris from entering the pump
- · 3 year warranty