

BALDOR® • RELIANCE 

Product Information Packet

CFM3136A

.5HP,1140RPM,3PH,60HZ,56YZ,3516M,OPEN,F1

Part Detail							
Revision:	S	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Elec. Spec:	35WG6771	CD Diagram:	CD0007	Mfg Plant:	
Mech. Spec:	35K306	Layout:	35LYK306	Poles:	06	Created Date:	
Base:	N	Eff. Date:	04-26-2018	Leads:	12#18		

Specs			
Catalog Number:	CFM3136A	Insulation Class:	F
Enclosure:	OPEN	Inverter Code:	Not Inverter
Frame:	56YZ	KVA Code:	L
Frame Material:	Steel	Lifting Lugs:	No Lifting Lugs
Output @ Frequency:	.500 HP @ 60 HZ	Locked Bearing Indicator:	No Locked Bearing
Synchronous Speed @ Frequency:	1200 RPM @ 60 HZ	Motor Lead Quantity/Wire Size:	12 @ 18 AWG
Voltage @ Frequency:	208.0 V @ 60 HZ	Motor Lead Exit:	Terminal Panel
	230.0 V @ 60 HZ	Motor Lead Termination:	None
	460.0 V @ 60 HZ	Motor Type:	3516M
XP Class and Group:	None	Mounting Arrangement:	F1
XP Division:	Not Applicable	Power Factor:	55
Agency Approvals:	UR	Product Family:	General Purpose
	CSA	Pulley End Bearing Type:	Sealed Bearing
Auxillary Box:	No Auxillary Box	Pulley Face Code:	Terminal Panel
Auxillary Box Lead Termination:	None	Pulley Shaft Indicator:	Key And Flat
Base Indicator:	No Mounting	Rodent Screen:	None
Bearing Grease Type:	Polyrex EM (-20F +300F)	Shaft Extension Location:	Pulley End
Blower:	None	Shaft Ground Indicator:	No Shaft Grounding

Current @ Voltage:	1.200 A @ 460.0 V	Shaft Rotation:	Reversible
	2.400 A @ 230.0 V	Shaft Slinger Indicator:	No Slinger
	2.500 A @ 208.0 V	Speed Code:	Single Speed
Design Code:	B	Motor Standards:	NEMA
Drip Cover:	No Drip Cover	Starting Method:	Direct on line
Duty Rating:	CONT	Thermal Device - Bearing:	NONE (OLD)
Electrically Isolated Bearing:	Not Electrically Isolated	Thermal Device - Winding:	Do Not Use Eve-Not Valiid
Feedback Device:	NO FEEDBACK	Vibration Sensor Indicator:	No Vibration Sensor
Front Face Code:	Standard	Winding Thermal 1:	Automatic Thermal Overload
Front Shaft Indicator:	None	Winding Thermal 1 Location:	SB
Heater Indicator:	No Heater	Winding Thermal 2:	None

Nameplate NP1257L	
CAT.NO.	CFM3136A
SPEC.	35K306-6771G1
HP	.5
VOLTS	208-230/460
AMP	2.5-2.4/1.2
RPM	1140
FRAME	56YZ
SER.F.	1.15
NEMA-NOM-EFF	70
RATING	60C AMB-CONT
CC	
DE	6203
ENCL	OPEN
CODE	L
PF	55
ODE	6205
HZ	60
DES	B
CL	F
PH	3
USABLE AT 208V	2.5
SN	

Parts List		
Part Number	Description	Quantity
SA079935	SA 35K306-6771G1	1.000 EA
RA073352	RA 35K306-6771G1	1.000 EA
TPMYJ72KX	THERMAL 3PH 0.75 AUT 120C	1.000 EA
RM1001A01	GROMMET "MIDSTATES"	1.000 EA
53XT0832G07	8-32X7/16 PN STD SR TY23G X	1.000 EA
HA6001A01	THERMAL RETAINER (PLATED)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
35EP3210B00	MASTER DE,205 BRG,1.000SH	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
MJ5004A05	#242-21 LOCTITE GENERAL PURPOSE MED. STR	0.010 EA
HW5100A03	WAVY WASHER (W1543-017)	1.000 EA
35EP3102B42	PUEP SH THRU HOLE .50 NPT, 2 #26 DRILL F	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
35CB4500SP	TERMINAL BOX LID STAMPED	1.000 EA
HA1041A01	CUPPED SLINGER KENCO	1.000 EA
HW2501D40	KEY, 3/16 SQ X 4.750	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
10XN2520A06	1/4 20X3/8 HX HD CAP	3.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
35GS1002A02	GASKET,1/16 THICK NEOPRE.FT.SMITH MADE	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
MG1000G27	MED CHARCOAL METALLIC GREY 400-0096	0.017 GA
SP5079A02	MODEL 35 3PH TERM PANEL CONN 12LD DUAL V	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HA3100A56	THRUBOLT 10-32 X 8.625	4.000 EA
LB1118	LABEL,WARNING (ROLL LABEL)	1.000 EA
LC0007A01	CONN LABEL TYPE M,DV,REV,12LD 2Y/1Y TERM	1.000 EA
NP1257L	ALUM UL CSA CC THERMAL REV MTG	1.000 EA
36PA1000	PKG GRP, PRINT PK1016A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 5/18	1.000 EA

AC Induction Motor Performance Data

Record # 61267 - Typical performance - not guaranteed values


Winding: 35WG6771-R005	Type: 3516M	Enclosure: OPEN
-------------------------------	--------------------	------------------------


Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	.5			Full Load Torque	2.33 LB-FT
Volts	208-230/460			Start Configuration	direct on line
Full Load Amps	2.5-2.4/1.2			Breakdown Torque	9.25 LB-FT
R.P.M.	1140			Pull-up Torque	6.59 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	7.01 LB-FT
NEMA Design Code	B	KVA Code	L	Starting Current	6.58 A
Service Factor (S.F.)	1.15			No-load Current	1.11 A
NEMA Nom. Eff.	70	Power Factor	55	Line-line Res. @ 25°C	35.4 Ω
Rating - Duty	60C AMB-CONT			Temp. Rise @ Rated Load	
				Locked-rotor Power Factor	71
				Rotor inertia	0.0949 LB-FT ²

Load Characteristics 460 V, 60 Hz, 0.5 HP


% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	25	36	46	55	62	67	59
Efficiency	43.4	59.3	66.6	70.4	71.9	72.1	71.3
Speed	1191	1183	1175	1167	1158	1148	1162
Line amperes	1.11	1.14	1.18	1.26	1.34	1.44	1.31

Performance Graph at 460V, 60Hz, 0.5HP Typical performance - Not guaranteed values

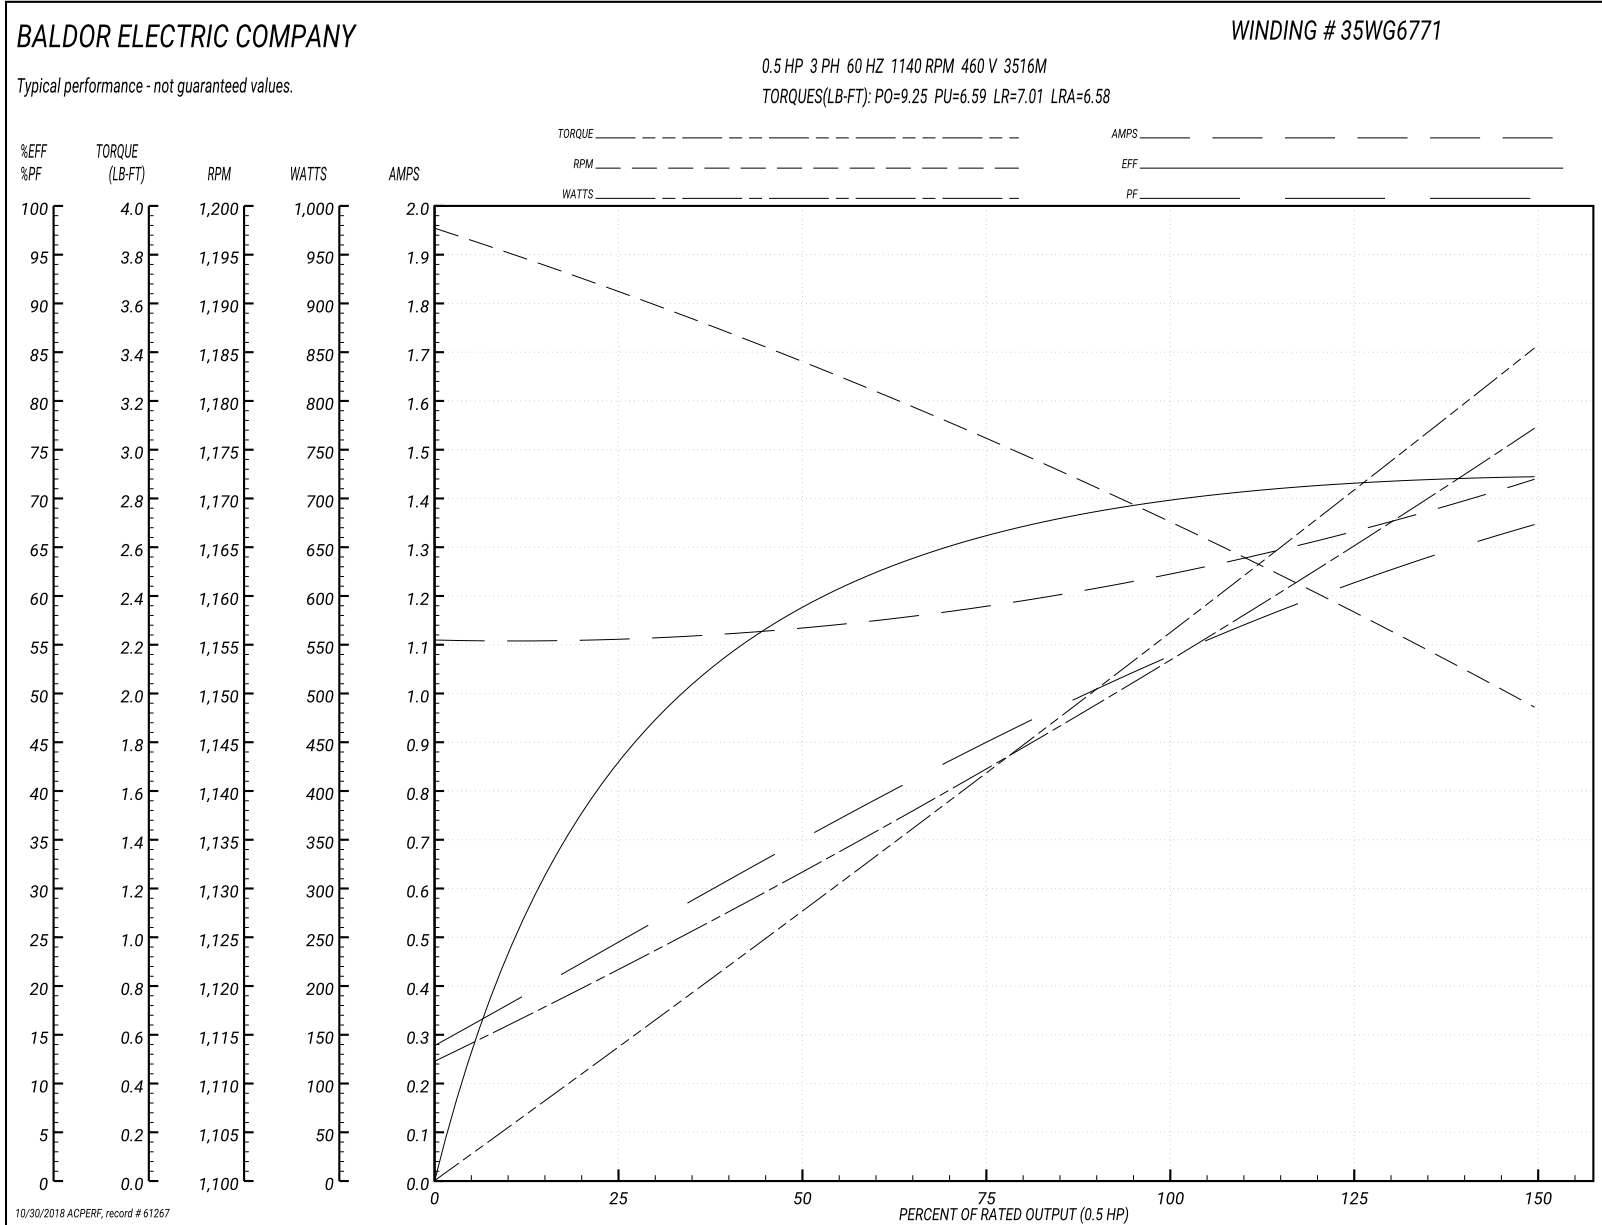


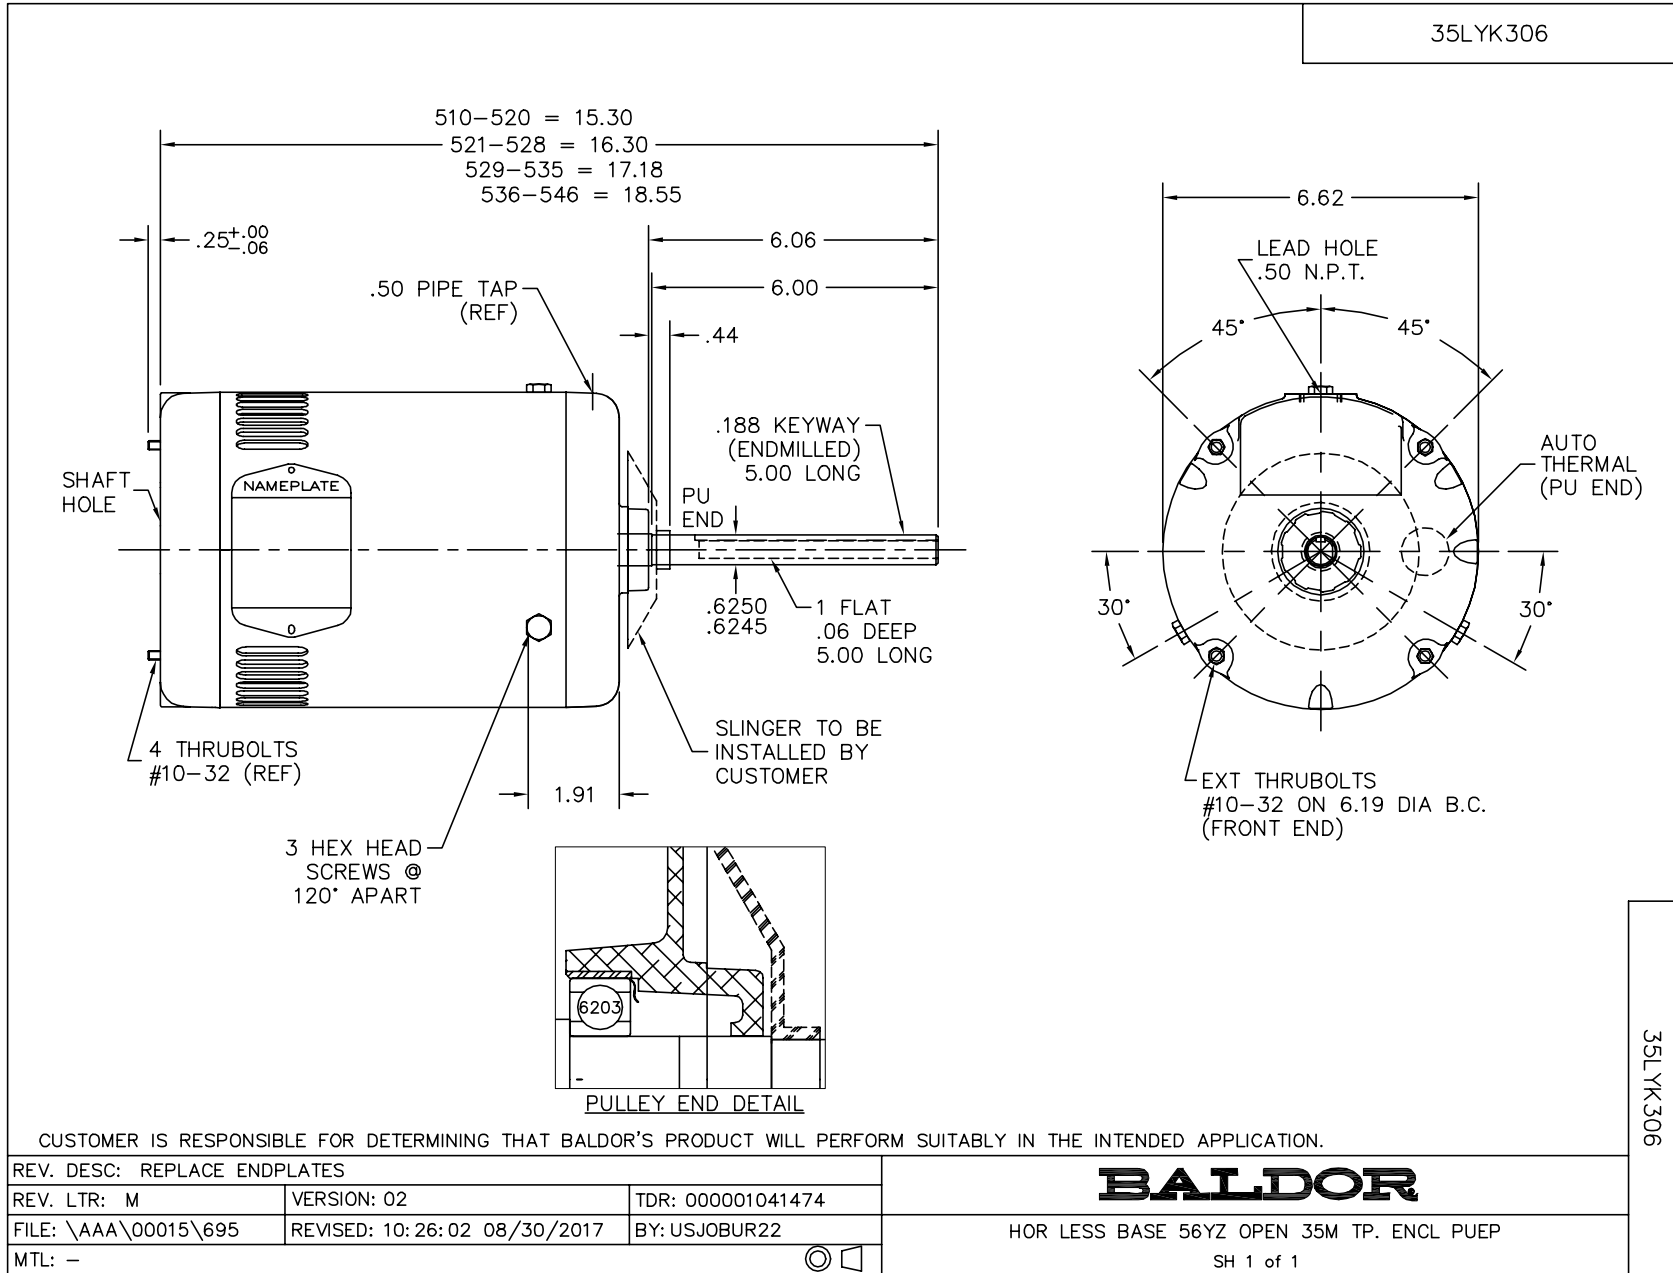

CD0007

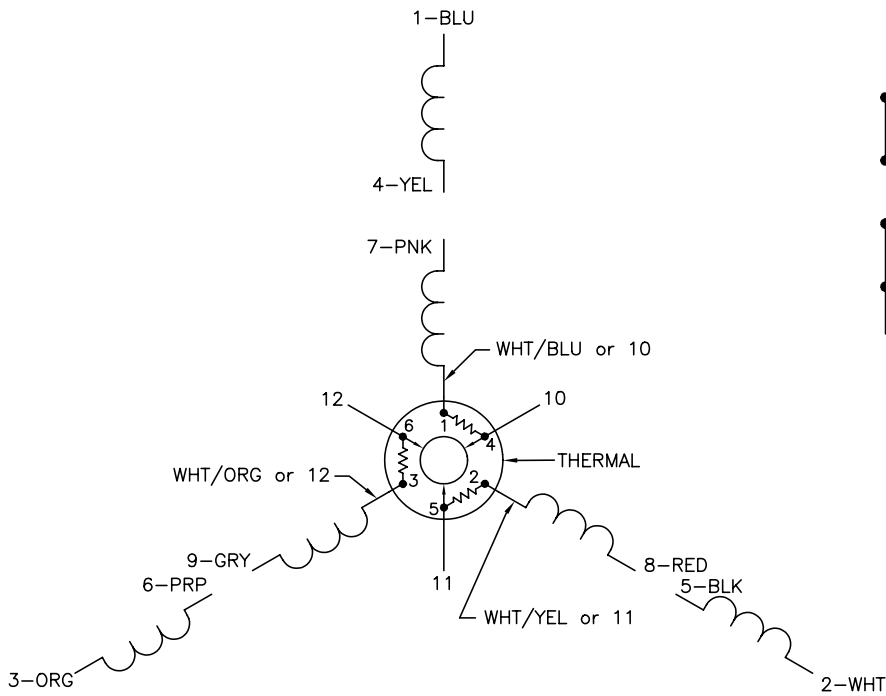


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED "CK" PLANT CODE			
REV. LTR: E	BY: EAH	REVISED: 05/06/99 17:1	TDR: 0181040
L00000		FILE: AAA00008370	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, THERMAL, 12 LEADS

CD0007